

WPX Wall Pack

120W | Colour Tunable | 120-347V



The most versatile architectural wall pack in Canada
Ideal for outdoor wall-mount applications such as commercial,
industrial, retail, or hospitality buildings

Type 3 Distribution Optics
Type 2 and Type 4 options available

Durable Die-Cast
Aluminum Housing

1/2" NPT Entry
on all sides



Approved by International
Dark Sky Association
when set for 3000K operation

120-347V Driver
with 6kV
surge protection

Colour Tunable
3000K/4000K/5000K

Optional Accesories (sold separately):
Visor, Type 2 Optics, Type 4 Optics



WPX-VISOR-L



WPX-T2L



WPX-T4L

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	14,499 lm
Efficacy	120.2 lm/W
CCT	3000K / 4000K / 5000K
CRI	73
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year


APPROVALS AND LISTINGS

cETL	5018387
DLC	PLACD7STWCD0

ILLUMINANCE AT A DISTANCE

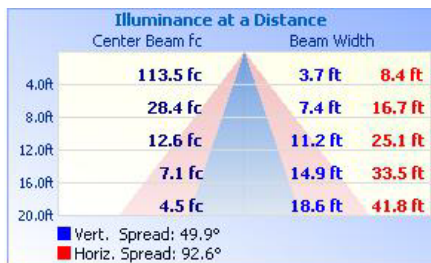

ISOCANDELA PLOT

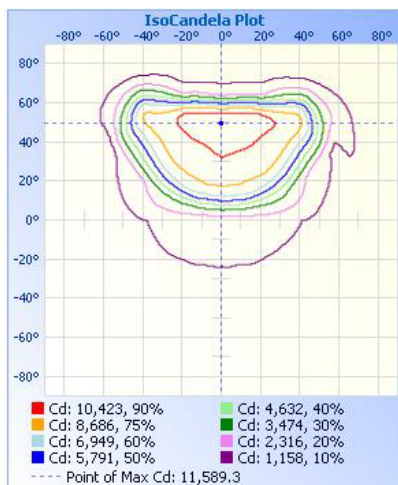

ELECTRICAL

Wattage	120W
Voltage	120-347V
Power Factor	0.96
THD	6.5%
Operating Temp	-30 to 45°C


CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Polycarbonate
Finish	Black
IP Rating	IP65
Net Weight	2.7 kg
Gross Weight	3.2 kg
Carton Qty	1
Carton Dimensions	215 x 310 x 275 mm

ACCESSORIES (Ordered Separately)

Visor	WPX-VISOR-L
Type 2 Optics	WPX-T2L
Type 4 Optics	WPX-T4L

DIMENSIONS

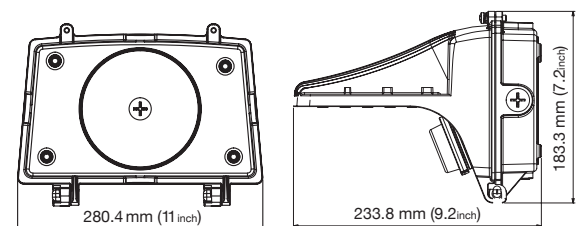

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com