

45W Canopy Light, HV

Ideal for parking structures, welding cells, paint lines, and parts inspections
Suitable for damp/wet locations or wherever a high impact-resistant fixture is required



Hinged mounting plate
for quick installation

Bronze powder-coat
finish



0-10V
dimmable driver

Philips surge
protector

TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	4,258 lm
Efficacy	113 lm/W
CCT	4000K
CRI	82.1
Beam angle	120°
Rated hours	100,000
Warranty	10-year

APPROVALS AND LISTINGS


cUL	E482965
DLC	PMN8T8E5

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	5.88 fc	47.1 ft	48.2 ft
34.0ft	1.47 fc	94.2 ft	96.4 ft
51.0ft	0.65 fc	141.2 ft	144.7 ft
68.0ft	0.37 fc	188.3 ft	192.9 ft
85.0ft	0.24 fc	235.4 ft	241.1 ft
102.0ft	0.16 fc	282.5 ft	289.3 ft

■ Vert. Spread: 108.3°
 ■ Horiz. Spread: 109.6°

ISO CANDELA PLOT

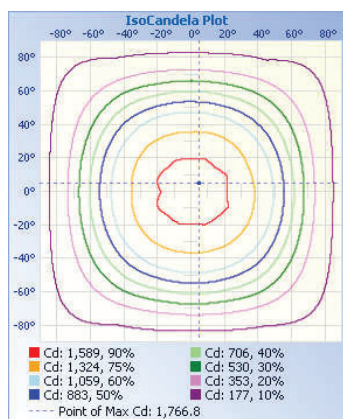


ELECTRICAL

Wattage	45W
Voltage	347-480V
Power factor	0.95
THD	9.12 %
Operating temp	-40 to 40° C

CONSTRUCTION

Housing	Aluminum alloy
Finish	Powder-coat
Colour	Bronze
IP rating	IP65
Weight	5.9lbs
Carton qty	4

DIMENSIONS

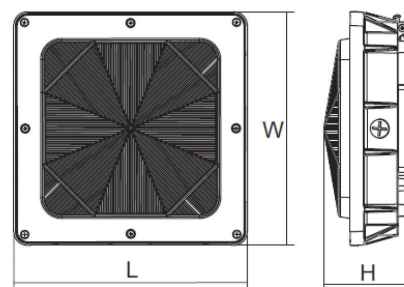

254x254x93 mm

10x10x3 5/8 inch

