

80W Canopy Light



Ideal for parking structures, welding cells, paint lines, and parts inspections
Suitable for damp/wet locations or wherever a high impact-resistant fixture is required



With dimming motion sensor - Order # CP80W-40K-MS
347V - Order # CP80W-40K-347V

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	9,548 lm
Efficacy	119.91 lm/W
CCT	4000K
CRI	82.5
Beam angle	120°
Rated hours	100,000
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E482965
DLC	PNT3XG51

ILLUMINANCE AT A DISTANCE

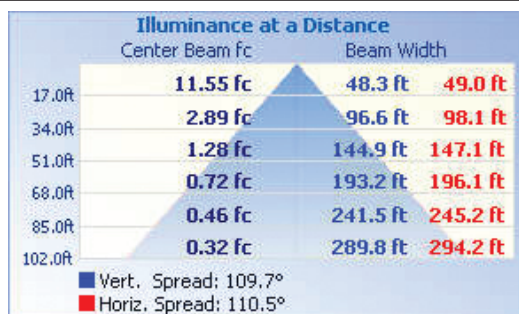

ISOCANDELA PLOT

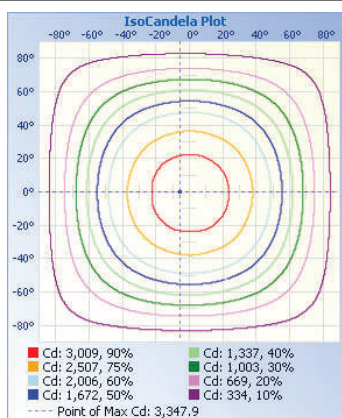


ELECTRICAL

Wattage	80W
Voltage	120-277V
Power factor	0.90
THD	12.32 %
Operating temp	-40 to 40° C

CONSTRUCTION

Housing	Aluminum alloy
Finish	Powder-coat
Colour	Bronze
IP rating	IP65
Weight	10.6lbs
Carton qty	2

DIMENSIONS

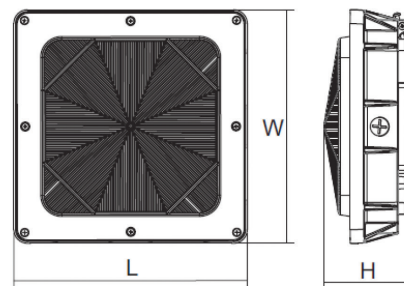

254x254x93 mm

14 x 14 x 3.625 inch

