

CWP02 80W Wall Pack



NEW CWP02 series Wall Packs
Ideal for exterior security and entryway lighting

LM80 tested
Lumiled light engine

Purpose built
driver inside

Glass lens

Die-cast aluminum body

Photocell ready



TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	11,652 lm
Efficacy	150.39 lm/W
CCT	5000K
CRI	80
Dimmable	0-10V
Warranty	10-year

APPROVALS AND LISTINGS


cUL	E482965
DLC Premium	PL6249BVOLEJ

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
3.3ft	223.4 fc	8.7 ft	6.6 ft
6.6ft	55.9 fc	17.4 ft	13.2 ft
9.9ft	24.8 fc	26.1 ft	19.8 ft
13.2ft	14.0 fc	34.8 ft	26.5 ft
16.5ft	8.9 fc	43.6 ft	33.1 ft
19.8ft	6.2 fc	52.3 ft	39.7 ft

■ Vert. Spread: 105.7°
 ■ Horiz. Spread: 90.1°

ISOCANDELA PLOT

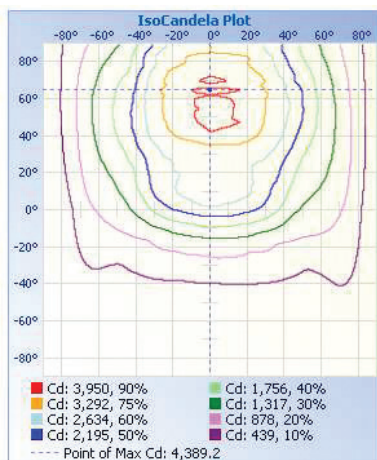

ELECTRICAL

Wattage	80W
Voltage	120-277V
Power factor	0.90
THD	15%
Operating temp	-40° to 40°C

CONSTRUCTION

Housing	Aluminum / Borosilicate glass
Colour	Bronze
IP rating	IP65
Weight	9.04 lbs
Carton qty	1

DIMENSIONS

