

80W Flood Light



Ideal for outdoor applications such as parking lots, construction sites, storage and rail yards, industrial locations, marinas, billboard/sign illumination and more



TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	10,342
Efficacy	130.81 lm/W
CCT	5000K
Beam angle	90 x 120°
CRI	82.2
Dimmable	No
Rated hours	50,000
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E352127
DLC	PDVU7QNZ

DIMENSIONS

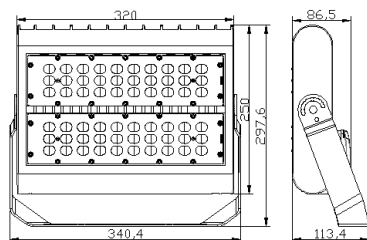

ILLUMINANCE AT A DISTANCE

	Illuminance at a Distance	
	Center Beam fc	Beam Width
17.0ft	11.00 fc	35.7 ft 62.4 ft
34.0ft	2.75 fc	71.4 ft 124.8 ft
51.0ft	1.22 fc	107.1 ft 187.2 ft
68.0ft	0.69 fc	142.7 ft 249.6 ft
85.0ft	0.44 fc	178.4 ft 312.0 ft
102.0ft	0.31 fc	214.1 ft 374.4 ft

■ Vert. Spread: 92.8°
■ Horiz. Spread: 122.8°

ELECTRICAL

Wattage	80W
Voltage	120-277V
Power factor	0.99
THD	16.02
Operating temp	-40° to 55°C

CONSTRUCTION

Housing	Aluminum
Finish	6mm, powder coat
Colour	Matte black
IP rating	IP65
Weight	11.9 lbs
Carton qty	1

NOTES

1m-cUL listed cable included

Optional slip fitter adaptor: #Slipfit-UV



PHOTOMETRIC SPECS

