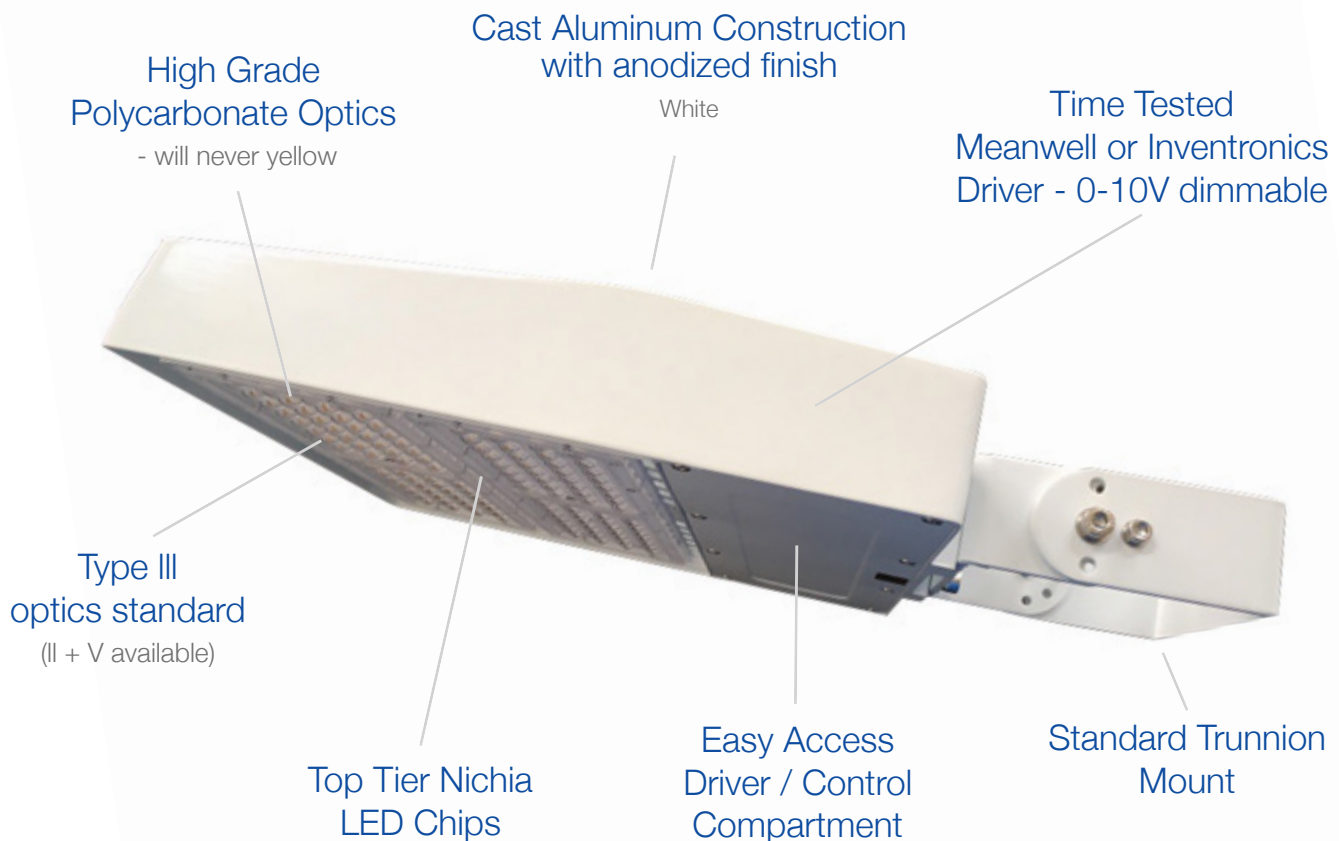


150W

**AREA / FLOOD LIGHT, HV**

Ideal for outdoor applications such as parking lots, construction sites, storage and rail yards, industrial locations, marinas, billboard/sign illumination, and more

126+ LM/W

Quick Change Mounting Options (additional cost):
Slip Fitter, Round Pole Arm, or Square Pole Arm

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	18,692 lm
Efficacy	126.04 lm/W
CCT	4000K
Distribution	Type III, Type II + V optional
CRI	83.8
Dimmable	0-10V
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E352127
DLC PREMIUM	PLCOA0LCPJL0

DIMENSIONS

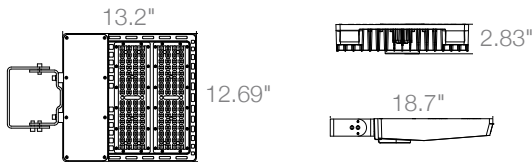

ISOCANDELA PLOT



ILLUMINANCE AT A DISTANCE

Distance	Illuminance at a Distance	
	Center Beam fc	Beam Width
17.00M	1.49 fc	41.22 M 97.07 M
34.00M	0.37 fc	82.44 M 194.15 M
51.00M	0.16 fc	123.66 M 291.22 M
68.00M	0.09 fc	164.88 M 388.30 M
85.00M	0.06 fc	206.10 M 485.36 M
102.00M	0.04 fc	247.33 M 582.45 M

■ Vert. Spread: 101.0°
■ Horiz. Spread: 141.4°

ELECTRICAL

Wattage	150W
Voltage	277-480V
Power factor	0.95
THD	9.8%
Operating temp	-40 to 40° C

CONSTRUCTION

Housing	Die cast aluminum
Finish	Anodized finish
Colour	White
IP rating	IP65
Weight	15.44 lbs
Carton qty	1

MOUNTING OPTIONS



Complete with Standard Trunnion Mount
Product #: FL03-150W-40K-HV



Optional Adjustable Slip Fit Mount
Product #: FL03-TA
(Available at an additional cost)



Optional Round Pole Arm Mount
Product #: FL03-TB
(Available at an additional cost)



Optional Square Pole Arm Mount
Product #: FL03-TC
(Available at an additional cost)



Photocell sensor available
Product #: FL03-PC-HV
(Available at an additional cost)