

200W




AREA / FLOOD LIGHT, HV



Ideal for outdoor applications such as parking lots, construction sites, storage and rail yards, industrial locations, marinas, billboard/sign illumination, and more

120+ LM/W

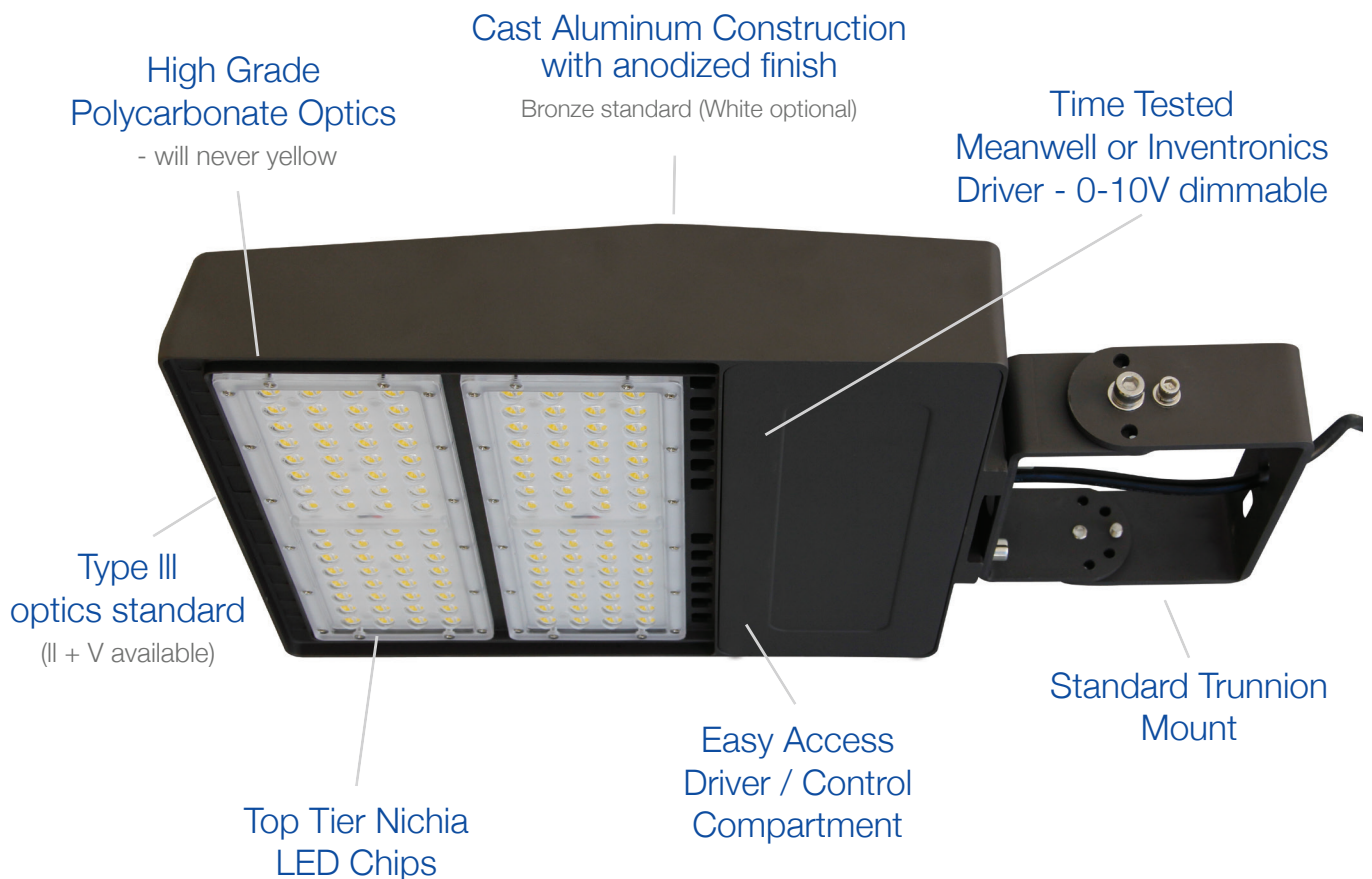

Quick Change Mounting Options (additional cost):
Slip Fitter, Round Pole Arm, or Square Pole Arm

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	24,822 lm
Efficacy	120.73 lm/W
CCT	4000K
Distribution	Type III, Type II + V optional
CRI	83.6
Dimmable	0-10V
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E352127
DLC PREMIUM	PLSZ1V0DTZZD

DIMENSIONS

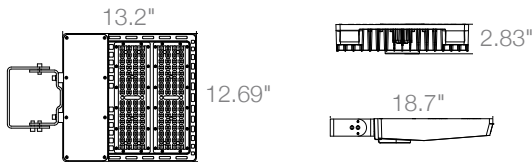

ISOCANDELA PLOT



ILLUMINANCE AT A DISTANCE

Distance	Center Beam fc	Beam Width
17.00M	1.94 fc	40.88 M 96.88 M
34.00M	0.48 fc	81.76 M 193.78 M
51.00M	0.22 fc	122.64 M 290.66 M
68.00M	0.12 fc	163.53 M 387.55 M
85.00M	0.08 fc	204.40 M 484.43 M
102.00M	0.05 fc	245.29 M 581.33 M

■ Vert. Spread: 100.5°
■ Horiz. Spread: 141.3°

ELECTRICAL

Wattage	200W
Voltage	277-480V
Power factor	0.95
THD	11.55%
Operating temp	-40 to 40° C

CONSTRUCTION

Housing	Die cast aluminum
Finish	Anodized finish
Colour	Bronze / White available
IP rating	IP65
Weight	15.44 lbs
Carton qty	1

MOUNTING OPTIONS



Complete with Standard Trunnion Mount
Product #: FL03-200W-40K-HV



Optional Adjustable Slip Fit Mount
Product #: FL03-TA
(Available at an additional cost)



Optional Round Pole Arm Mount
Product #: FL03-TB
(Available at an additional cost)



Optional Square Pole Arm Mount
Product #: FL03-TC
(Available at an additional cost)



Photocell sensor available
Product #: FL03-PC-HV
(Available at an additional cost)