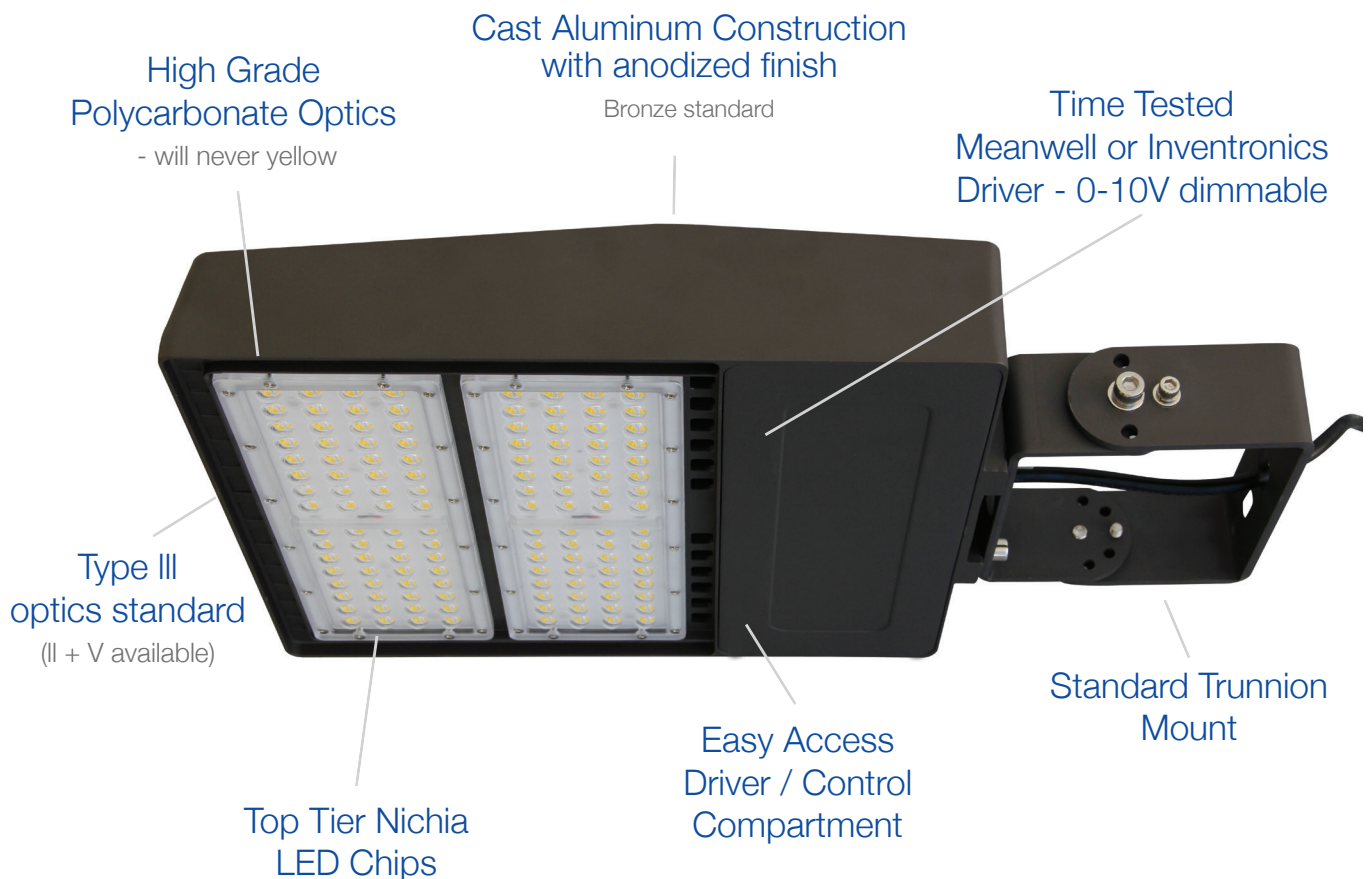


240W

**AREA / FLOOD LIGHT**

Ideal for outdoor applications such as parking lots, construction sites, storage and rail yards, industrial locations, marinas, billboard/sign illumination, and more

**121+ LM/W**

Quick Change Mounting Options (additional cost):  
Slip Fitter, Round Pole Arm, or Square Pole Arm

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	29,147 lm
Efficacy	121.75 lm/W
CCT	4000K
Distribution	Type III, Type II + V optional
CRI	83.3
Dimmable	0-10V
Warranty	10-year


### APPROVALS AND LISTINGS

cUL	E352127
DLC PREMIUM	PLRRCGMH78LD

### DIMENSIONS

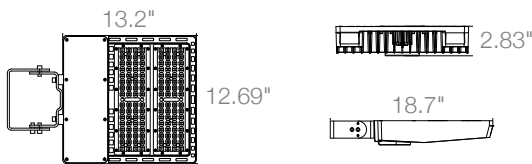

### ISOCANDELA PLOT

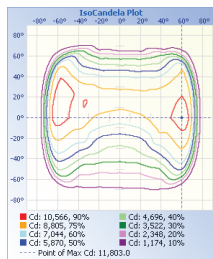

### ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	26.8 fc	44.0 ft	102.9 ft
34.0ft	6.69 fc	88.1 ft	205.7 ft
51.0ft	2.97 fc	132.1 ft	308.6 ft
68.0ft	1.67 fc	176.1 ft	411.4 ft
85.0ft	1.07 fc	220.1 ft	514.3 ft
102.0ft	0.74 fc	264.2 ft	617.1 ft

■ Vert. Spread: 104.6°  
■ Horiz. Spread: 143.4°

### ELECTRICAL

Wattage	240W
Voltage	100-277V
Power factor	0.94
THD	5.34%
Operating temp	-40 to 40° C

### CONSTRUCTION

Housing	Die cast aluminum
Finish	Anodized finish
Colour	Bronze
IP rating	IP65
Weight	15.44 lbs
Carton qty	1

### MOUNTING OPTIONS



Complete with Standard Trunnion Mount  
Product #: FL03-240W-40K



Optional Adjustable Slip Fit Mount  
Product #: FL03-TA  
(Available at an additional cost)



Optional Round Pole Arm Mount  
Product #: FL03-TB  
(Available at an additional cost)



Optional Square Pole Arm Mount  
Product #: FL03-TC  
(Available at an additional cost)



Photocell sensor available  
Product #: FL03-PC  
(Available at an additional cost)