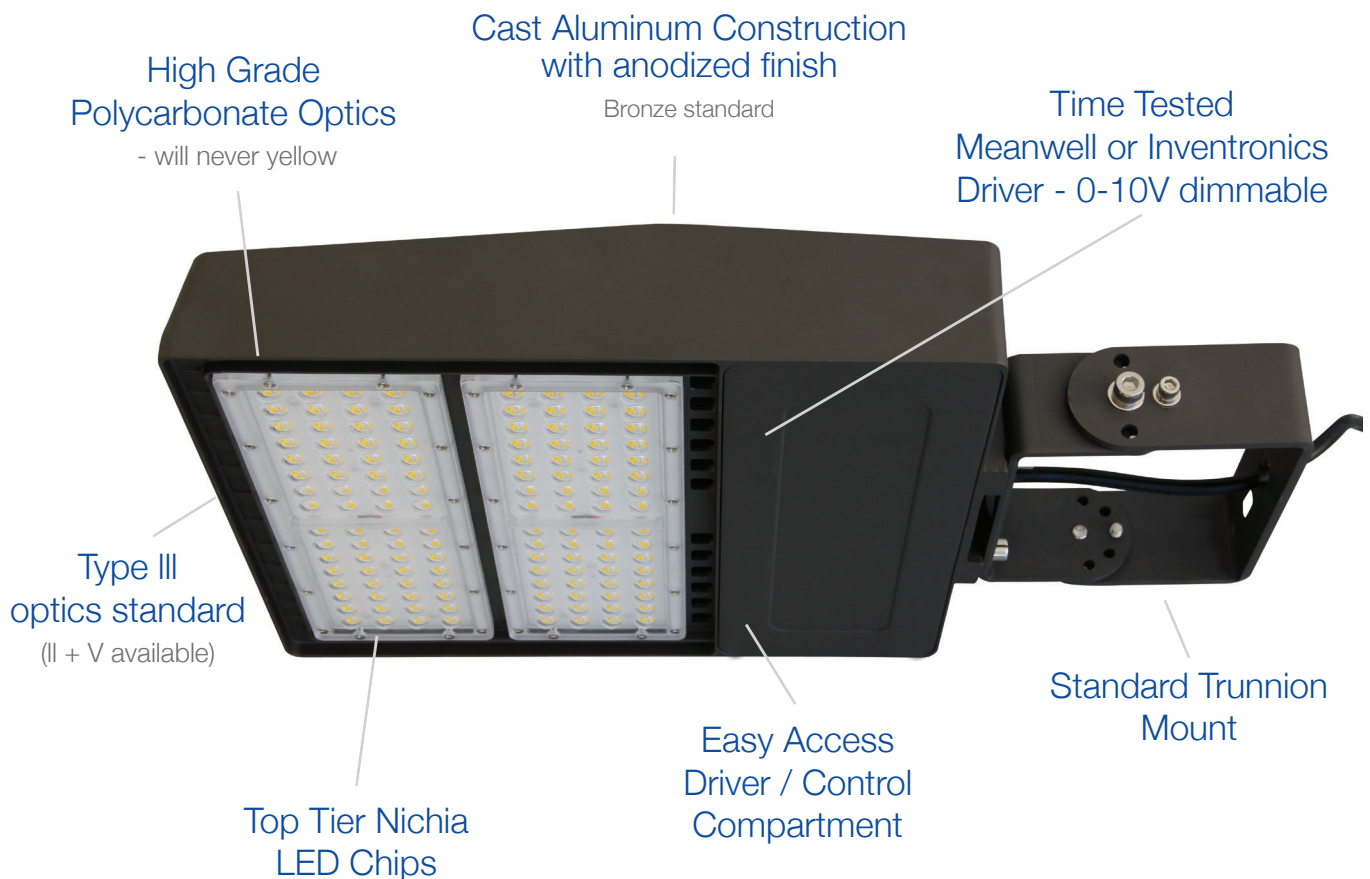


240W

**AREA / FLOOD LIGHT, HV**

Ideal for outdoor applications such as parking lots, construction sites, storage and rail yards, industrial locations, marinas, billboard/sign illumination, and more

**123+ LM/W**

Quick Change Mounting Options (additional cost):  
Slip Fitter, Round Pole Arm, or Square Pole Arm

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	28,720 lm
Efficacy	123.05 lm/W
CCT	5000K
Distribution	Type III, Type II + V optional
CRI	80
Dimmable	0-10V
Warranty	10-year


### APPROVALS AND LISTINGS

cUL	E352127
DLC PREMIUM	PLEFPSVCDYVT

### DIMENSIONS

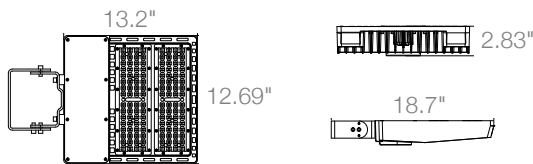

### ISOCANDELA PLOT



### ILLUMINANCE AT A DISTANCE

Distance	Center Beam fc	Beam Width	Beam Area
17.00M	2.16 fc	37.87 M	91.52 M
34.00M	0.54 fc	75.74 M	183.05 M
51.00M	0.24 fc	113.61 M	274.57 M
68.00M	0.14 fc	151.49 M	366.10 M
85.00M	0.09 fc	189.36 M	457.62 M
102.00M	0.06 fc	227.23 M	549.15 M

■ Vert. Spread: 96.2°  
■ Horiz. Spread: 139.2°

### ELECTRICAL

Wattage	240W
Voltage	277-480V
Power factor	0.90
THD	15%
Operating temp	-40 to 40° C

### CONSTRUCTION

Housing	Die cast aluminum
Finish	Anodized finish
Colour	Bronze
IP rating	IP65
Weight	15.44 lbs
Carton qty	1

### MOUNTING OPTIONS



Complete with Standard Trunnion Mount  
Product #: FL03-240W-50K-HV



Optional Adjustable Slip Fit Mount  
Product #: FL03-TA  
(Available at an additional cost)



Optional Round Pole Arm Mount  
Product #: FL03-TB  
(Available at an additional cost)



Optional Square Pole Arm Mount  
Product #: FL03-TC  
(Available at an additional cost)



Photocell sensor available  
Product #: FL03-PC-HV  
(Available at an additional cost)