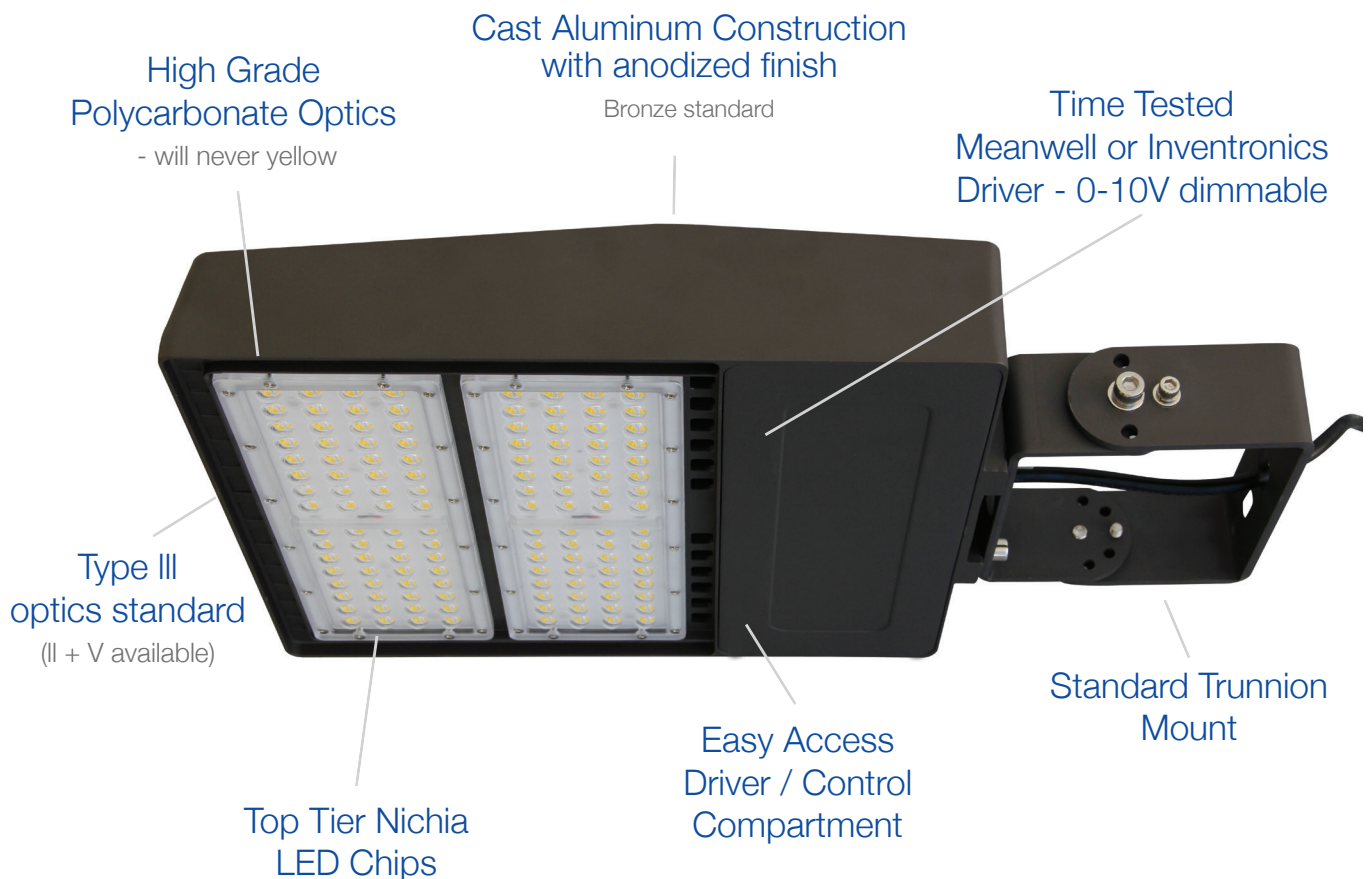


240W

**AREA / FLOOD LIGHT**

Ideal for outdoor applications such as parking lots, construction sites, storage and rail yards, industrial locations, marinas, billboard/sign illumination, and more

122+ LM/W

Quick Change Mounting Options (additional cost):
Slip Fitter, Round Pole Arm, or Square Pole Arm

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	29,389 lm
Efficacy	122.86 lm/W
CCT	5000K
Distribution	Type III, Type II + V optional
CRI	80
Dimmable	0-10V
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E352127
DLC PREMIUM	PL36CCCHCJ5P


DIMENSIONS

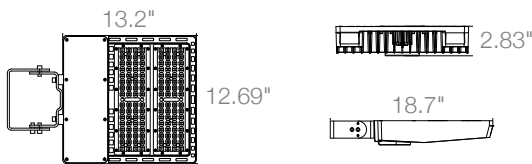

ISOCANDELA PLOT

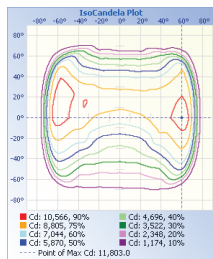

ILLUMINANCE AT A DISTANCE

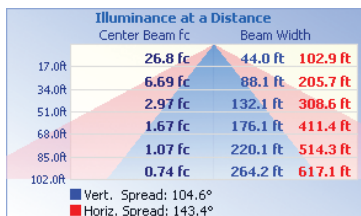

ELECTRICAL

Wattage	240W
Voltage	100-277V
Power factor	0.90
THD	15%
Operating temp	-40 to 40° C

CONSTRUCTION

Housing	Die cast aluminum
Finish	Anodized finish
Colour	Bronze
IP rating	IP65
Weight	15.44 lbs
Carton qty	1

MOUNTING OPTIONS



Complete with Standard Trunnion Mount
Product #: FL03-240W-50K



Optional Adjustable Slip Fit Mount
Product #: FL03-TA
(Available at an additional cost)



Optional Round Pole Arm Mount
Product #: FL03-TB
(Available at an additional cost)



Optional Square Pole Arm Mount
Product #: FL03-TC
(Available at an additional cost)



Photocell sensor available
Product #: FL03-PC
(Available at an additional cost)