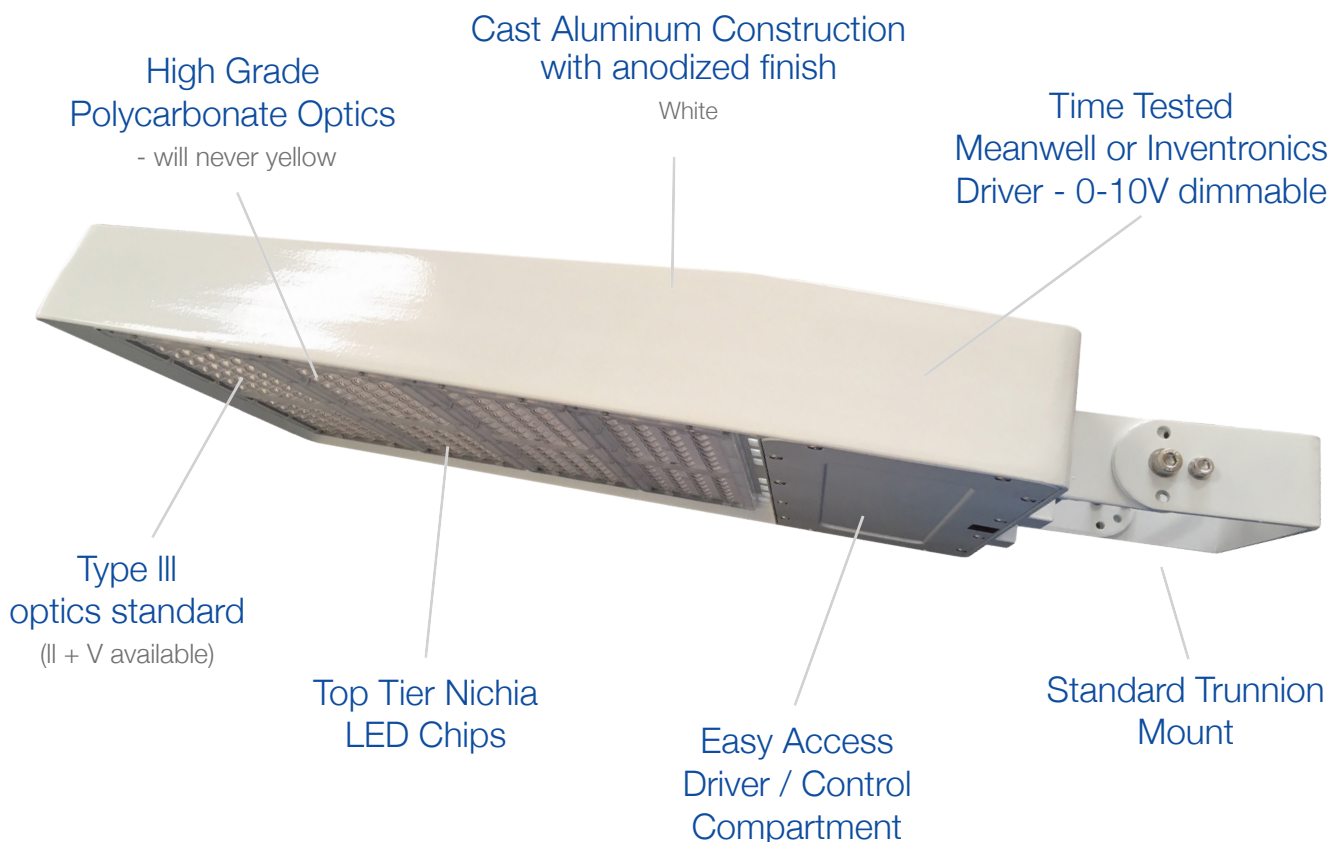


300W

**AREA / FLOOD LIGHT, HV**

Ideal for outdoor applications such as parking lots, construction sites, storage and rail yards, industrial locations, marinas, billboard/sign illumination, and more

124+ LM/W

Quick Change Mounting Options (additional cost):
Slip Fitter, Round Pole Arm, or Square Pole Arm

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	36,807 lm
Efficacy	124.68 lm/W
CCT	4000K
Distribution	Type III, Type II + V optional
CRI	84.1
Dimmable	0-10V
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E352127
DLC PREMIUM	PL111ZF5ONL4

DIMENSIONS

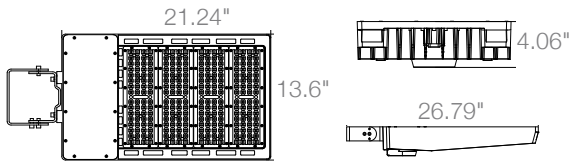

ISOCANDELA PLOT



ILLUMINANCE AT A DISTANCE

Distance (M)	Illuminance at a Distance	
	Center Beam fc	Beam Width
17.00M	2.82 fc	38.66 M 85.99 M
34.00M	0.71 fc	77.33 M 171.99 M
51.00M	0.31 fc	116.00 M 257.98 M
68.00M	0.18 fc	154.67 M 343.99 M
85.00M	0.11 fc	193.33 M 429.98 M
102.00M	0.08 fc	232.00 M 515.98 M

■ Vert. Spread: 97.3°
■ Horiz. Spread: 136.9°

ELECTRICAL

Wattage	300W
Voltage	277-480V
Power factor	0.95
THD	11.09%
Operating temp	-40 to 40° C

CONSTRUCTION

Housing	Die cast aluminum
Finish	Anodized finish
Colour	White
IP rating	IP65
Weight	23.8 lbs
Carton qty	1

MOUNTING OPTIONS



Complete with Standard Trunnion Mount
Product #: FL03-300W-40K-HV



Optional Adjustable Slip Fit Mount
Product #: FL03-TA
(Available at an additional cost)



Optional Round Pole Arm Mount
Product #: FL03-TB
(Available at an additional cost)



Optional Square Pole Arm Mount
Product #: FL03-TC
(Available at an additional cost)



Photocell sensor available
Product #: FL03-PC-HV
(Available at an additional cost)