

150W Flood / Area Light, 277-480V



NEW FL04 Series

Sleek, streamlined design with premium performance

LM80
Tested Chips

Polyester
Powder Coat Finish
Bronze Standard



Highest Grade
Polycarbonate Optics

Type III Standard
Type V Available

Trunnion Mount Standard

Field-Interchangeable:
Slip Fitter, Pole, or Multi-Mount
Ordered Separately

Options available (ordered separately):

Pole Mount



FL04-PM

Multi Mount



FL04-MM

Slip Fit Mount



FL04-SF

Visor



FL04-SHIELD-SM

Photocell



FLPC-HV

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	19,179 lm
Efficacy	125.79 lm/W
CCT	4000K
CRI	72.7
L70 Life	54,000
Dimmable	0-10V
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E482965
DLC	PLD5LEHD8W0G

ILLUMINANCE AT A DISTANCE

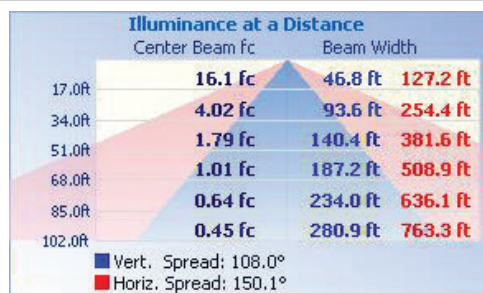

ISOCANDELA PLOT

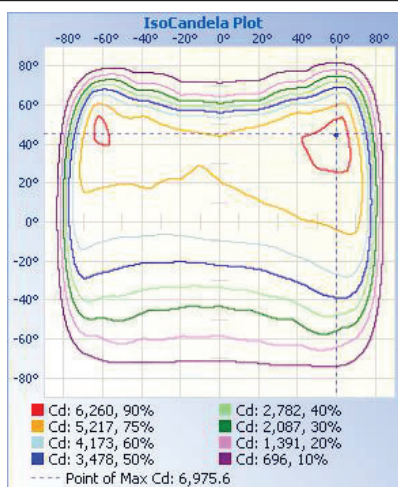

ELECTRICAL

Wattage	150W
Voltage	277-480V
Power factor	0.92
THD	11.63 %
Operating temp	-40 to 40°C

CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder coat
Colour	Bronze
IP rating	IP65
EPA rating	45° - 1.13 ft² Horizontal - 0.8 ft² Vertical - 1.6 ft²
Weight	11.02 lbs
Carton qty	1

DIMENSIONS

