

# 150W Flood / Area Light



NEW FL04 Series

Sleek, streamlined design with premium performance

LM80  
Tested Chips

Polyester  
Powder Coat Finish  
White

Highest Grade  
Polycarbonate Optics

Type III Standard  
Type V Available

Shown here with  
Slip Fitter Mount

Trunnion Mount Standard  
Field-Interchangeable:  
Slip Fitter, Pole, or Multi-Mount  
Ordered Separately

Options available (ordered separately):

Pole Mount



FL04-PM-WH

Multi Mount



FL04-MM-WH

Slip Fit Mount



FL04-SF-WH

Visor



FL04-SHIELD-SM-WH

Motion Sensor or Photocell



FL04-MMS-KIT

FLPC-LV

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	19,818 lm
Efficacy	127 lm/W
CCT	5000K
CRI	70
L70 Life	54,000
Dimmable	0-10V
Warranty	10-year


### APPROVALS AND LISTINGS

cUL	E482965
DLC	PL0SFML82GT5

### ILLUMINANCE AT A DISTANCE

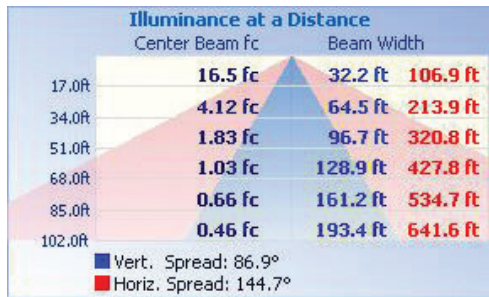

### ISOCANDELA PLOT

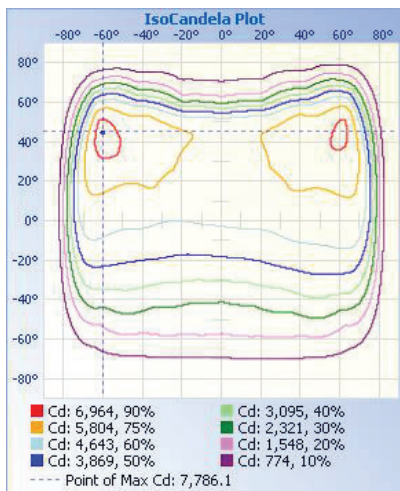

### ELECTRICAL

Wattage	150W
Voltage	120-277V
Power factor	0.90
THD	15%
Operating temp	-40 to 40°C

### CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder coat
Colour	White
IP rating	IP65
EPA rating	45° - 1.13 ft <sup>2</sup> Horizontal - 0.8 ft <sup>2</sup> Vertical - 1.6 ft <sup>2</sup>
Weight	11.02 lbs
Carton qty	1

### DIMENSIONS

