

# 200W Flood / Area Light, 277-480V



NEW FL04 Series

Sleek, streamlined design with premium performance

LM80  
Tested Chips

Polyester  
Powder Coat Finish  
Bronze Standard



Shown here with  
Slip Fitter Mount

Highest Grade  
Polycarbonate Optics

Type III Standard  
Type V Available

Trunnion Mount Standard

Field-Interchangeable:  
Slip Fitter, Pole, or Multi-Mount  
Ordered Separately

Options available (ordered separately):

Pole Mount



FL04-PM

Multi Mount



FL04-MM

Slip Fit Mount



FL04-SF

Visor



FL04-SHIELD-LG

Photocell



FLPC-HV

## TECHNICAL DATA



### LIGHT SPECIFICATIONS

Lumens	25,611 lm
Efficacy	127.49 lm/W
CCT	4000K
CRI	73
L70 life	54,000
Dimmable	0-10V
Warranty	10-year

### APPROVALS AND LISTINGS


cUL	E482965
DLC	PLET21923F7Z

### ILLUMINANCE AT A DISTANCE

Illuminance at a Distance			
	Center Beam fc	Beam Width	
17.0ft	22.6 fc	49.8 ft	143.4 ft
34.0ft	5.66 fc	99.7 ft	286.7 ft
51.0ft	2.52 fc	149.5 ft	430.1 ft
68.0ft	1.42 fc	199.3 ft	573.5 ft
85.0ft	0.91 fc	249.2 ft	716.8 ft
102.0ft	0.63 fc	299.0 ft	860.2 ft

■ Vert. Spread: 111.4°  
■ Horiz. Spread: 153.3°

### ISOCANDELA PLOT

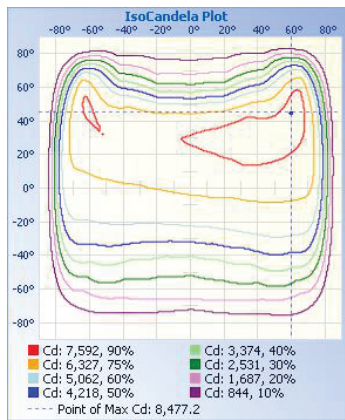

### ELECTRICAL

Wattage	200W
Voltage	277-4807V
Power factor	0.95
THD	9.92%
Operating temp	-40 to 40°C

### CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder coat
Colour	Bronze
IP rating	IP65
EPA rating	45° - 1.75 ft <sup>2</sup> Horizontal - 1.1 ft <sup>2</sup> Vertical - 2.3 ft <sup>2</sup>
Weight	15.43 lbs
Carton qty	1

### DIMENSIONS

