

# 300W Flood / Area Light, 277-480V



NEW FL04 Series  
Sleek, streamlined design with premium performance

LM80  
Tested Chips

Polyester  
Powder Coat Finish  
Bronze Standard



Highest Grade  
Polycarbonate Optics

Type III Standard  
Type V Available

Shown here with  
Pole Mount

Trunnion Mount Standard

Field-Interchangeable:  
Slip Fitter, Pole, or Multi-Mount  
Ordered Separately

Options available (ordered separately):

Pole Mount

Multi Mount

Slip Fit Mount

Photocell



FL04-PM-WH

FL04-MM-WH

FL04-SF-WH

FLPC-HV

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	36,980 lm
Efficacy	126.82 lm/W
CCT	5000K
CRI	70
L70 Life	54,000
Dimmable	0-10V
Warranty	10-year


### APPROVALS AND LISTINGS

cUL	E482965
DLC	PLEB38EB2B8T

### ILLUMINANCE AT A DISTANCE

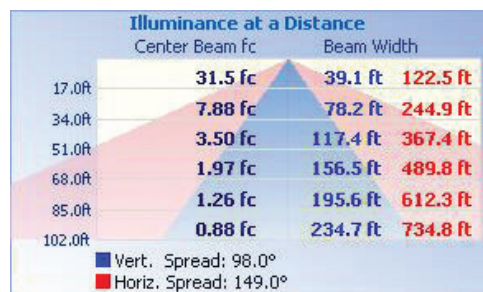

### ISOCANDELA PLOT

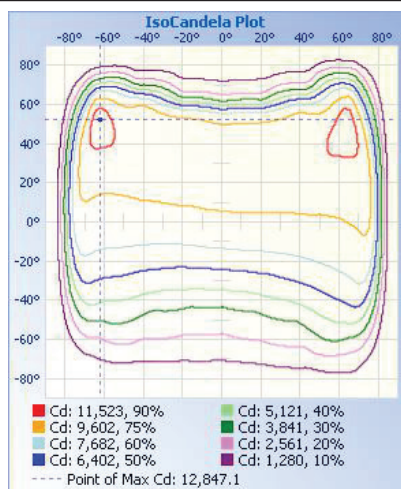

### ELECTRICAL

Wattage	300W
Voltage	277-480V
Power factor	0.900
THD	15 %
Operating temp	-40 to 40°C

### CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder coat
Colour	White
IP rating	IP65
EPA rating	45° - 1.75 ft² Horizontal - 1.1 ft² Vertical - 2.3 ft²
Weight	17.64 lbs
Carton qty	1

### DIMENSIONS

