

# 450W Flood / Area Light, 277-480V



NEW FL04 Series

Sleek, streamlined design with premium performance

LM80  
Tested Chips

Polyester  
Powder Coat Finish  
Bronze Standard



Highest Grade  
Polycarbonate Optics

Type III Standard  
Type V Available

Trunnion Mount Standard

Field-Interchangeable:  
Slip Fitter, Pole, or Multi-Mount  
Ordered Separately

Options available (ordered separately):

Pole Mount



FL04-PM

Multi Mount



FL04-MM

Slip Fit Mount



FL04-SF

Photocell



FLPC-HV

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	56,013 lm
Efficacy	126.87 lm/W
CCT	4000K
CRI	73.7
L70 Life	54,000
Warranty	10-year


### APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLQCO030EP0G

### ILLUMINANCE AT A DISTANCE

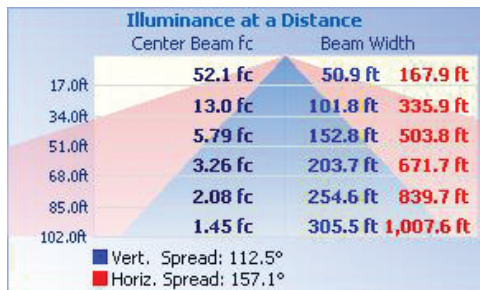

### ISOCANDELA PLOT

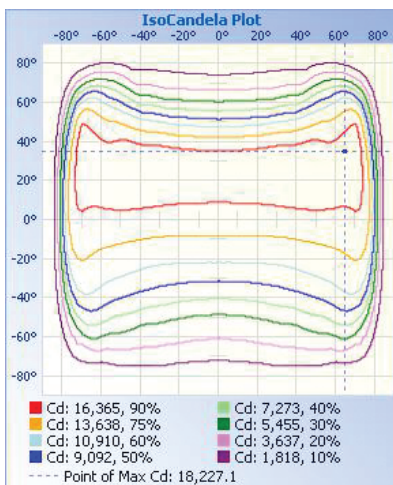

### ELECTRICAL

Wattage	450W
Voltage	277-480V
Power factor	0.93
THD	14.21%
Operating temp	-40 to 40°C

### CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder coat
Colour	Bronze
IP rating	IP65
EPA rating	45° - 2.34 ft <sup>2</sup> Horizontal - 1.4 ft <sup>2</sup> Vertical - 3.2 ft <sup>2</sup>
Weight	27.3 lbs
Carton qty	1

### DIMENSIONS

