

160W High Bay


HB5 series, HV



Ideal for all indoor high bay applications including warehouses, manufacturing plants, showrooms, and retail applications



Fast easy installation with chain hook suspension kit (1m) included

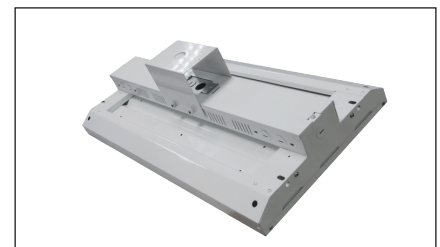

TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	20,372 lm
Efficacy	130.09 lm/W
CCT	4000K
CRI	82
Beam angle	120°
Rated hours	50,000
Warranty	5-year

APPROVALS AND LISTINGS


cUL	E482965
DLC Premium	PL767PCR3AQV

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.00M	2.45 fc	45.49 M	45.23 M
34.00M	0.61 fc	90.98 M	90.46 M
51.00M	0.27 fc	136.47 M	135.69 M
68.00M	0.15 fc	181.96 M	180.92 M
85.00M	0.10 fc	227.45 M	226.15 M
102.00M	0.07 fc	272.94 M	271.38 M

■ Vert. Spread: 106.4°
■ Horiz. Spread: 106.1°

ISO CANDELA PLOT

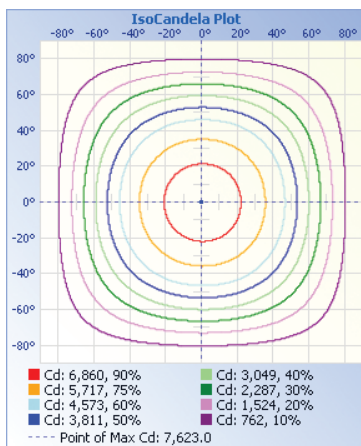


ELECTRICAL

Wattage	160W
Voltage	277-480V
Power factor	0.95
THD	10.12%
Operating temp	-20 to 40° C

CONSTRUCTION

Housing	Steel
Finish	Powder coat
Colour	White
IP rating	IP54
Weight	24 lbs
Carton qty	1

DIMENSIONS

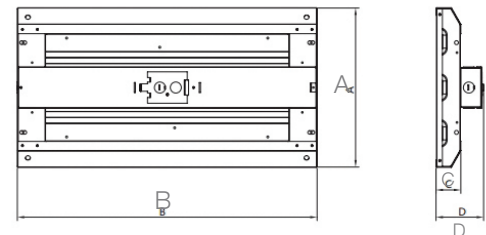

A: 12.60" C: 1.97"
B: 45.87" D: 3.78"