

225W High Bay


HB5 series, HV



Ideal for all indoor high bay applications including warehouses, manufacturing plants, showrooms, and retail applications.



Fast easy installation with chain & hook suspension kit (1m) included.

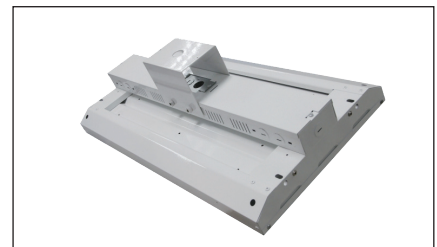

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	27,084 lm
Efficacy	130.27 lm/W
CCT	4000K
CRI	83.6
Beam angle	120°
Rated hours	50,000
Warranty	5-year


APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLX4N16ZJMSX

ILLUMINANCE AT A DISTANCE

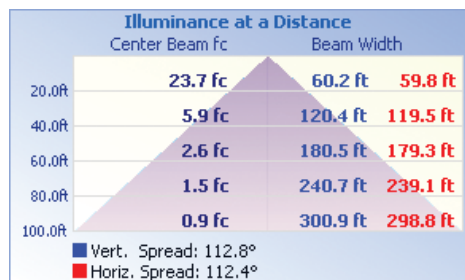

ISO CANDELA PLOT

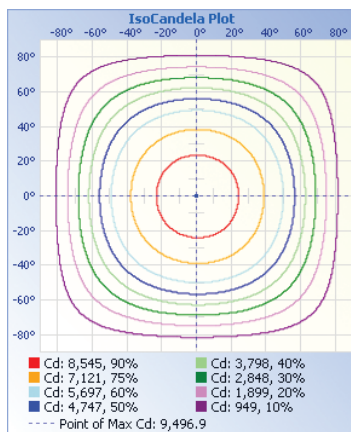


ELECTRICAL

Wattage	225W
Voltage	277-480V
Power factor	.96
THD	8.75%
Operating temp	-20 to 40° C

CONSTRUCTION

Housing	Steel
Finish	Powder coat
Colour	White
IP rating	IP54
Weight	25 lbs
Carton qty	1

DIMENSIONS

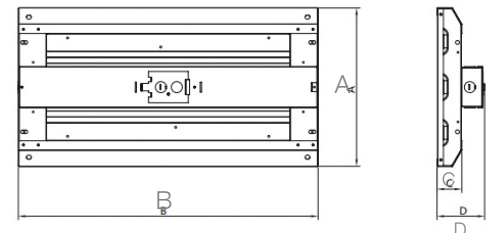

A: 12.60" C: 1.97"
 B: 45.87" D: 3.78"