

# HBE 220W High Bay



Smart and stylish design for better cooling and high lumen efficacy  
Optional motion sensor and/or yoke available

Comes with 2m  
power cord

0-10V  
Dimming



Impact resistant, high grade  
polycarbonate lens will not yellow

Suitable for use in hockey rinks  
and food processing facilities



Shown with  
OPTIONAL YOKE  
#HBE-yoke



Shown with  
OPTIONAL MOTION  
SENSOR KIT  
#HBE-F-MS-IO

## TECHNICAL DATA



## LIGHT SPECIFICATIONS

Lumens	27,456
Efficacy	126.18 lm/W
CCT	5000K
Beam angle	90°
CRI	82.9
Dimmable	0-10V
Rated hours	50,000
Warranty	5-year


## APPROVALS AND LISTINGS

cUL	E482965
DLC	PXNJXDP4

## DIMENSIONS

Φ14"×6.9"

## ISO CANDELA PLOT

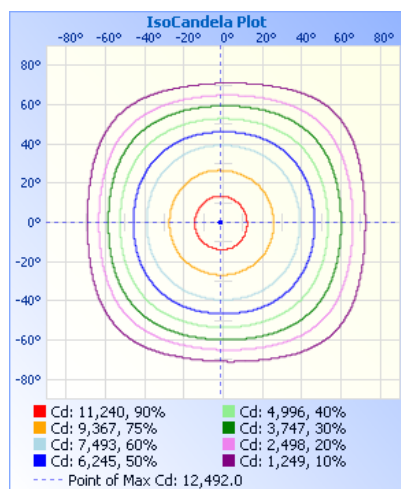

## ELECTRICAL

Wattage	220W
Voltage	277-480V
Power factor	0.95
THD	11.23%
Operating temp	-40 to 40°C

## CONSTRUCTION

Housing	Aluminum
Finish	Powder-coat
Colour	Black
IP rating	IP65
Weight	15.4
Carton qty	1

## ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	43.2 fc	35.8 ft	35.5 ft
34.0ft	10.8 fc	71.5 ft	70.9 ft
51.0ft	4.8 fc	107.3 ft	106.4 ft
68.0ft	2.7 fc	143.1 ft	141.8 ft
85.0ft	1.7 fc	178.8 ft	177.3 ft
102.0ft	1.2 fc	214.6 ft	212.7 ft

■ Vert. Spread: 92.9°  
■ Horiz. Spread: 92.4°