




100W High Bay, HV

Pendant style High Bay with Premium Performance

Optional microwave motion sensor, aluminum reflector, PC reflector, anti-glare kit, yoke, and emergency battery back-up kit available

Polyester
Powder Coat
Finish

High-impact
tempered glass with
high light transmittance

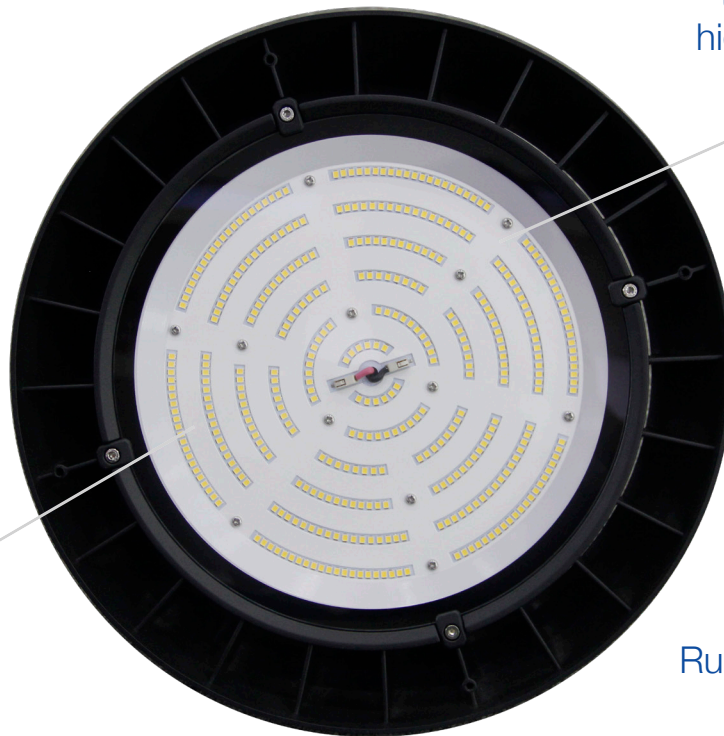

IP65

Rugged Cast Aluminum

0-10V
Dimmable



Shown with optional Dimmable Motion Sensor



Shown with optional Emergency Battery Back Up Kit



Shown with optional Frosted Polycarbonate Lens



Shown with optional Clear Polycarbonate Lens



TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	14,311
Efficacy	141.55 lm/W
CCT	5000K
Beam angle	110°
CRI	80
Dimmable	0-10V
Rated hours	50,000
Warranty	5-year


APPROVALS AND LISTINGS

cUL	E482965
DLC PREMIUM	PL800CH9FF2N

DIMENSIONS



ILLUMINANCE AT A DISTANCE

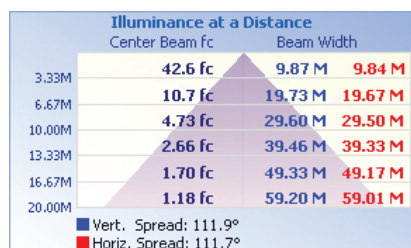


ELECTRICAL

Wattage	100W
Voltage	277-480V
Power factor	0.87
THD	23.41%
Operating temp	-40 to 40°C

CONSTRUCTION

Housing	Cast Aluminum
Finish	Powder Coat
Colour	Black
IP rating	IP65
Weight	9.2 lbs

INSTALLATION INSTRUCTIONS

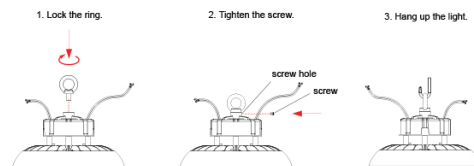

ACCESSORIES AVAILABLE

Microwave Motion Sensor Kit	HBP-MMS-KIT-HV
Aluminum Reflector	HBP-AL-REF-A
PC Reflector	HBP-PC-REF-A
Anti-glare Kit	HBP-AGK-A
Yoke	HBP-YK-A
Emergency Battery Backup Kit	HBP-EBU
Frosted Polycarbonate Lens	HBP-FR-LENS-A
Clear Polycarbonate Lens	HBP-PC-LENS-A