


100W Hot Stick



Ideal for warehouses, manufacturing, showrooms, and retail applications
High-end look and performance



Aircraft suspension cable kit included



TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	15,000
Efficacy	145 lm/W
CCT	5000K
Beam angle	120°
CRI	80
LED Chip	93,000 hours
Warranty	5-year

APPROVALS AND LISTINGS

cUL	E482965
DLC PREMIUM	P9BAC31A

DIMENSIONS

3 feet


ELECTRICAL

Wattage	100W
Voltage	120-277V
Power factor	0.90
THD	15%
Operating temp	-20 to 50°C

CONSTRUCTION

Housing	Extruded Aluminum
IP rating	IP65
Weight	11.3 lbs
Carton qty	1

ISOCANDELA DIAGRAM

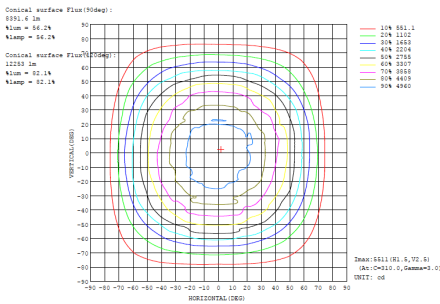

ILLUMINANCE AT A DISTANCE

