


220W Linear High Bay



Suitable for manufacturing, shops and warehouse applications

Slim, compact design. 120-347V

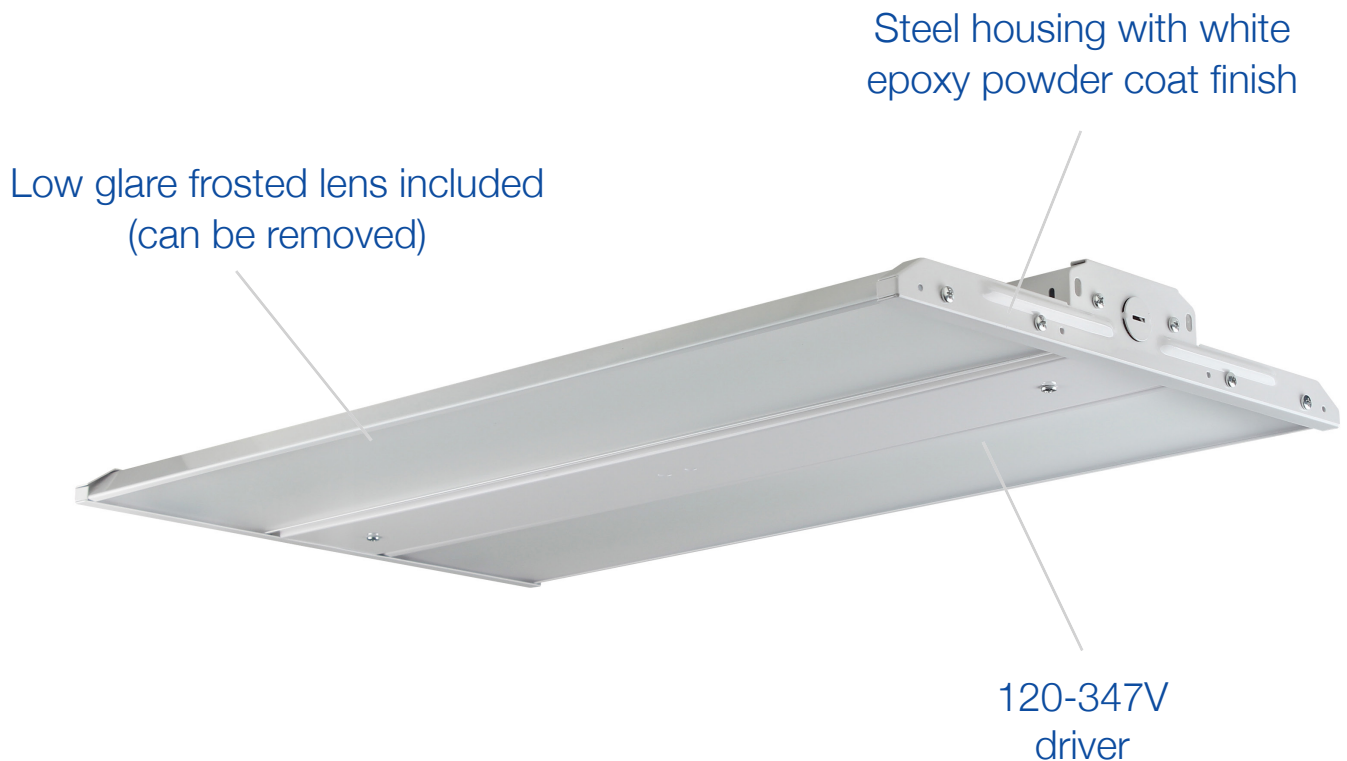

Chain mounts and v-hooks included

Optional dimmable motion sensor ordered separately

Optional wire guard ordered separately

Optional bracket ordered separately

TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	30,581 lm
Efficacy	139.38 lm/W
CCT	4000K
CRI	80
Beam angle	100°
L70 Life	50,000
Dimmable	0-10V
Warranty	5-year

ELECTRICAL

Wattage	220W
Voltage	120-347V
Power factor	0.90
THD	15%
Operating temp	-40 to 50°C


APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLZ9I4DEFUJA
LED CHIP	LUMILEDS 2835


CONSTRUCTION

Housing	Steel
Finish	White
IP rating	IP40 (damp location)
Weight	4.1lbs
Carton qty	2

ISOCANDELA PLOT



DIMENSIONS

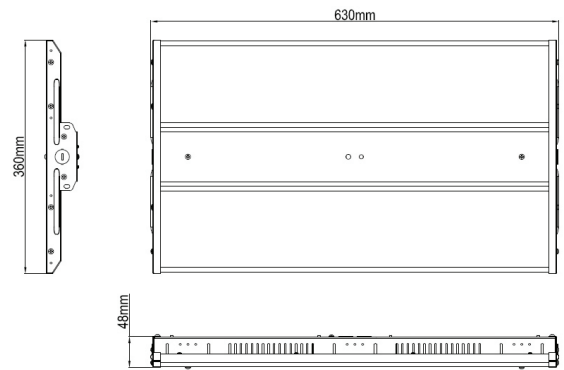

ILLUMINANCE AT A DISTANCE

