

60W Direct Lit Vapour Proof

Ideal for parking structures, welding cells, paint lines, and parts inspections
Suitable for damp/wet locations or wherever a high impact-resistant fixture is required

Corrosion-, flame-, and vandal-resistant



Top grade UV stabilized
Bayer Makrolon polycarbonate
construction

Ultra-low V2
flammability rating

4 rows of Samsung SMD LEDs
ensures incredibly low glare
and high thermal management

0-10V dimmable
Optional motion sensor available

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	7,500 lm
Efficacy	125 lm/W
CCT	5000K
Beam angle	N/A
CRI	80
Dimmable	Yes
Rated hours	50,000
Warranty	5-year

APPROVALS AND LISTINGS

cUL	E482965
DLC	PL0Z8AFB267C

DIMENSIONS

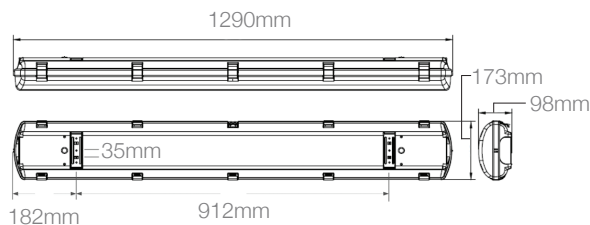

51"x13"x15"

ELECTRICAL

Wattage	60W
Voltage	120-277V
Power factor	0.95
THD	10%
Operating temp	-40 to 40°C

CONSTRUCTION

Housing	Polycarbonate
Colour	Grey
IP rating	IP65
Length	4 feet
Weight	8 lbs
Carton qty	6

