

75W Pole Top Area Light



Elegant look and design
Ideal for parking lots, pathways, parks, retail settings, and more



TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	9,117 lm
Efficacy	120.36 lm/W
CCT	4000K
CRI	82.9
Distribution	Type V
Rated hours (L70)	92,000
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PL0MV4CD46G6

ISOCANDELA PLOT

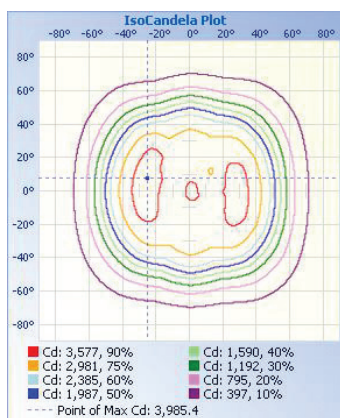

ILLUMINANCE AT A DISTANCE

	Illuminance at a Distance	
	Center Beam fc	Beam Width
17.0ft	13.0 fc	32.9 ft 40.8 ft
34.0ft	3.26 fc	65.7 ft 81.5 ft
51.0ft	1.45 fc	98.6 ft 122.3 ft
68.0ft	0.82 fc	131.4 ft 163.0 ft
85.0ft	0.52 fc	164.3 ft 203.8 ft
102.0ft	0.36 fc	197.1 ft 244.5 ft

■ Vert. Spread: 88.0°
 ■ Horiz. Spread: 100.3°

ELECTRICAL

Wattage	75W
Voltage	120-277V
Power factor	0.92
THD	13.5
Operating temp	-40° to 60° C

CONSTRUCTION

Housing	Aluminium alloy
Finish	Polyester powder coat
Colour	Bronze
IP rating	IP65
Weight	14.33 lbs
Carton qty	1

DIMENSIONS

