

60W

ROTATABLE LUMINAIRE



Ideal for security lighting, wall washing, flood lighting, and more
Use as a flood light - uplight, downlight, or both!

2 Independent Rotatable Modules
to offer flexible light control

Oversized Heat Sink
for superior thermal management



Heavy Die Cast
Aluminum

LM80 tested
CREE chips

Superior anodized
paint finish

Optional Extension Plate: RWP-EXT-PLATE
(ordered separately)

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	7,809 lm
Efficacy	128.46 lm/W
CCT	4000K
Beam angle	60°
CRI	73.8
Dimmable	No
Rated hours	50,000
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC PREMIUM	PLUFD2DWXNQ6

DIMENSIONS

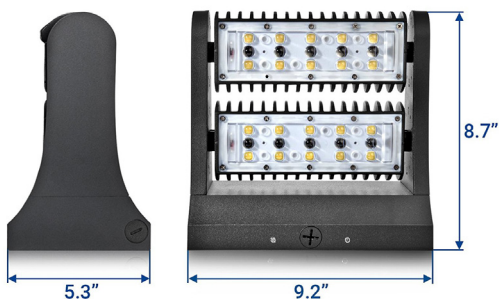

MAKE THE SMART CHOICE.
 COMPARE LUMENS PER WATT
128+ LM/W

ELECTRICAL

Wattage	60W
Voltage	100-277V
Power factor	0.9
THD	12.31%
Operating temp	-30° to 45° C

CONSTRUCTION

Housing	Cast aluminum
Finish	Anodized finish
Colour	Black
IP rating	IP65
Weight	6.68 lbs
Carton qty	2

ILLUMINANCE CONE

