

# 80W

## ROTATABLE LUMINAIRE



Ideal for security lighting, wall washing, flood lighting, and more  
Use as a flood light - uplight, downlight, or both!

2 Independent Rotatable Modules  
to offer flexible light control

Oversized Heat Sink  
for superior thermal management



Heavy Die Cast  
Aluminum

LM80 tested  
CREE chips

Superior anodized  
paint finish

Optional Extension Plate: RWP-EXT-PLATE  
(ordered separately)

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	10,598 lm
Efficacy	133.36 lm/W
CCT	5000K
Beam angle	60°
CRI	73.6
Dimmable	No
Rated hours	50,000
Warranty	10-year

### APPROVALS AND LISTINGS

cUL	E482965
DLC PREMIUM	PLKHX0ZFGF0A

### DIMENSIONS

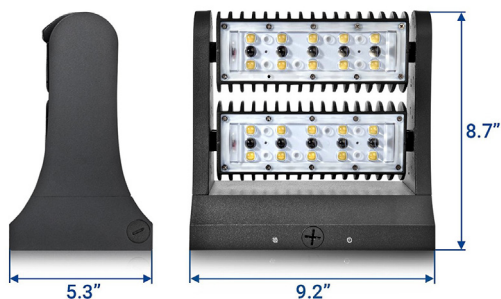

MAKE THE SMART CHOICE.  
 COMPARE LUMENS PER WATT  
**133+ LM/W**

### ELECTRICAL

Wattage	80W
Voltage	100-277V
Power factor	0.94
THD	12.32%
Operating temp	-30° to 45° C

### CONSTRUCTION

Housing	Cast aluminum
Finish	Anodized finish
Colour	Black
IP rating	IP65
Weight	6.68 lbs
Carton qty	2

### ILLUMINANCE CONE

