


Direct / Indirect Panel Light

Ideal for offices, conference rooms, retail stores, reception areas, hallways, and education facilities

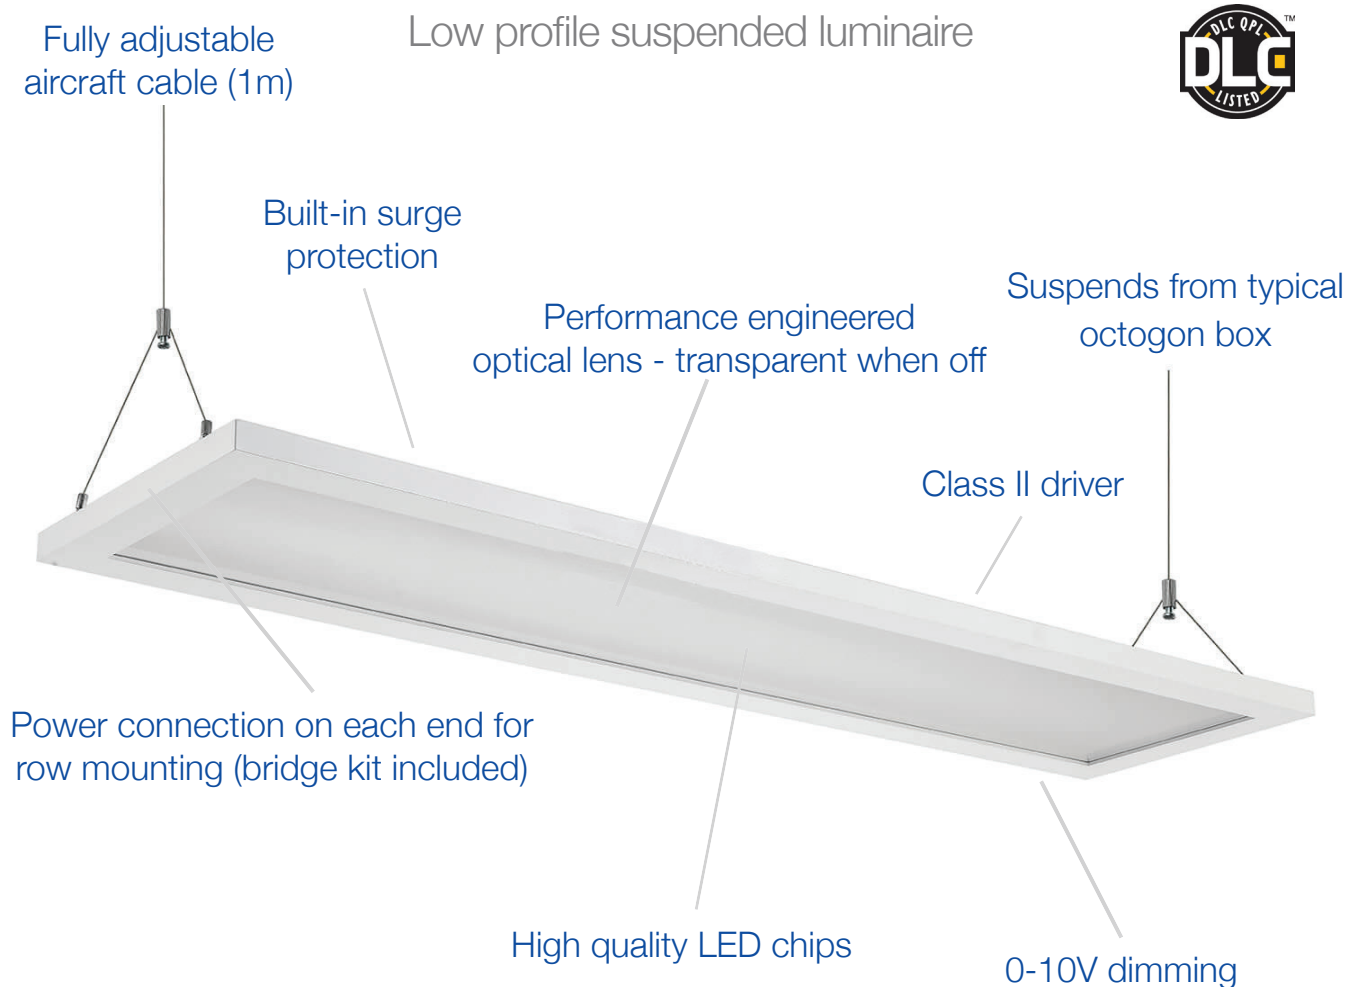

Unique design - uplight and downlight
Light distribution - 40% up, 60% down

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	4,104
Efficacy	109 lm/W
CCT	4000K
CRI	81.2
Dimmable	Yes
Rated hours	50,000
Warranty	5-year

APPROVALS AND LISTINGS

cUL	E482965
DLC	PLQJZ1MGJSU6

DIMENSIONS

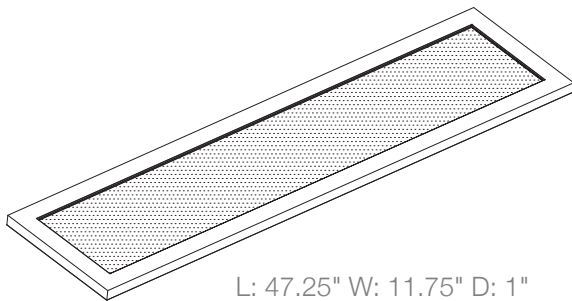

ELECTRICAL

Wattage	40W
Voltage	120-277V
Power factor	0.92
THD	15.41%
Operating temp	-20° to 40°C

CONSTRUCTION

Framing	Alluminum
Colour	White
IP rating	IP20
Carton qty	2

INCLUDED

- Panel
- 1m aircraft cable (x2)
- White canopy octagon cover
- Bridging kit (for row mounting)

* Power cable not included
recommend white fixture cable