



VARO SERIES **CONFIGURATION INSPIRATION**

Create Endless Custom Lighting Layouts

VARO


ARCHITECTURAL LINEARS

CONNECTORS AVAILABLE
in Black and White (sold separately)





X Connector

ALV-CON-X-WH
ALV-CON-X-BK





T Connector

ALV-CON-T-WH
ALV-CON-T-BK





90° Connector

ALV-CON-L-WH
ALV-CON-L-BK



120° Connector

ALV-CON-V-WH
ALV-CON-V-BK



For Inline Linear Connections, use ALV-CON-IL




Flexible Mounting Options:

T-Bar, Recessed, Wall Mount, Suspension,
and Surface Mount Kits sold separately




ALV SERIES SUSPENSION MOUNTING & SPACING GUIDE

The ALV Series features fully adjustable sliding mounting brackets on the back of each fixture, giving installers the ultimate flexibility to easily dodge on-site ceiling obstructions like studs, HVAC ducts, or plumbing. While the mounts can slide anywhere within the track to adapt to field conditions, the guidelines below provide our engineered spacing configurations to ensure perfect structural balance, eliminate long-term centre-sag, and achieve flawless visual symmetry.


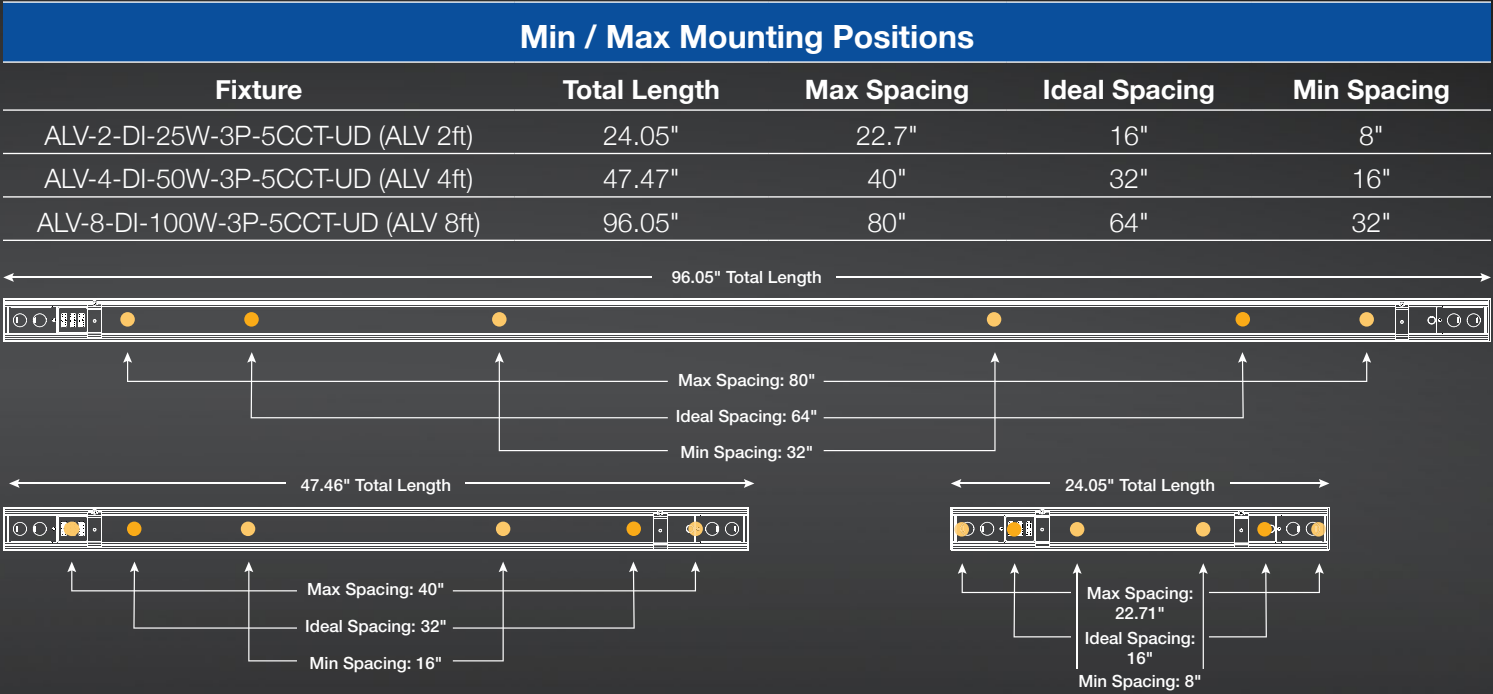


Linear Run Configuration Mounting Point Requirements				
Linear Run Length	Fixture Combination	Minimum # of Mounting Locations	Outer End Mounts	Even Spacing Guide
6 ft	4ft + 2ft	2	12" in from ends	N/A
8 ft	8ft	2	16" in from ends	N/A
10 ft	8ft + 2ft	3	12" in from ends	48" apart
12 ft	8ft + 4ft	3	12" in from ends	60" apart
14 ft	8ft + 4ft + 2ft	4	12" in from ends	48" apart
16 ft	8ft + 8ft	3	16" in from ends	80" apart
18 ft	8ft + 8ft + 2ft	4	12" in from ends	64" apart
20 ft	8ft + 8ft + 4ft	4	12" in from ends	72" apart
22 ft	8ft + 8ft + 4ft + 2ft	5	12" in from ends	60" apart
24 ft	8ft + 8ft + 8ft	4	16" in from ends	64" apart
26 ft	8ft + 8ft + 8ft + 2ft	5	12" in from ends	72" apart
28 ft	8ft + 8ft + 8ft + 4ft	5	16" in from ends	76" apart
30 ft	8ft + 8ft + 8ft + 4ft + 2ft	6	12" in from ends	67" apart
32 ft	8ft + 8ft + 8ft + 8ft	5	16" in from ends	88" apart
34 ft	8ft + 8ft + 8ft + 8ft + 2ft	6	12" in from ends	77" apart
36 ft	8ft + 8ft + 8ft + 8ft + 4ft	6	16" in from ends	80" apart



Rectangle Configurations


Parts Required for Configuration:

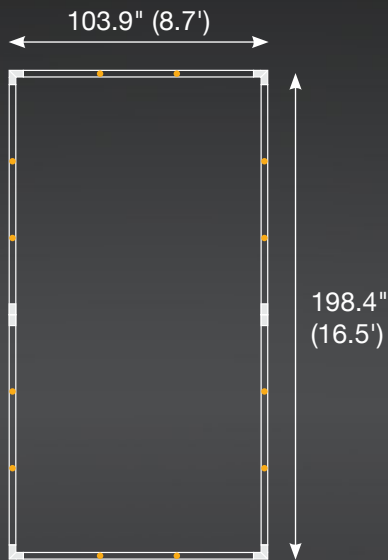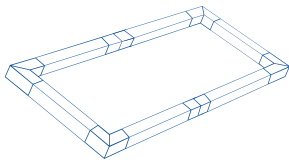

8' ALV (1x2)	
QTY	Product #
6	ALV-8-DI-100W-3P-5CCT-UD
4	ALV-CON-L (90° Connector)
2	ALV-CON-IL (Inline Connector)
6	ALV-SUS (Suspension Kit)
2 (120V)	ALV-CORD (Power Cord)
1 (347V)	ALV-CORD (Power Cord)
6	ALV-CPY (Canopy) Optional
17 x 2	ALV-LENS-FR-1FT (Seamless Lens) Optional



8' ALV (1x3)	
QTY	Product #
8	ALV-8-DI-100W-3P-5CCT-UD
4	ALV-CON-L (90° Connector)
4	ALV-CON-IL (Inline Connector)
8	ALV-SUS (Suspension Kit)
2 (120V)	ALV-CORD (Power Cord)
1 (347V)	ALV-CORD (Power Cord)
8	ALV-CPY (Canopy) Optional
25 x 2	ALV-LENS-FR-1FT (Seamless Lens) Optional

Note: Yellow dots indicate the minimum required mounting points and estimated mounting positions. See page 3 for minimum, maximum, and ideal mounting distances.

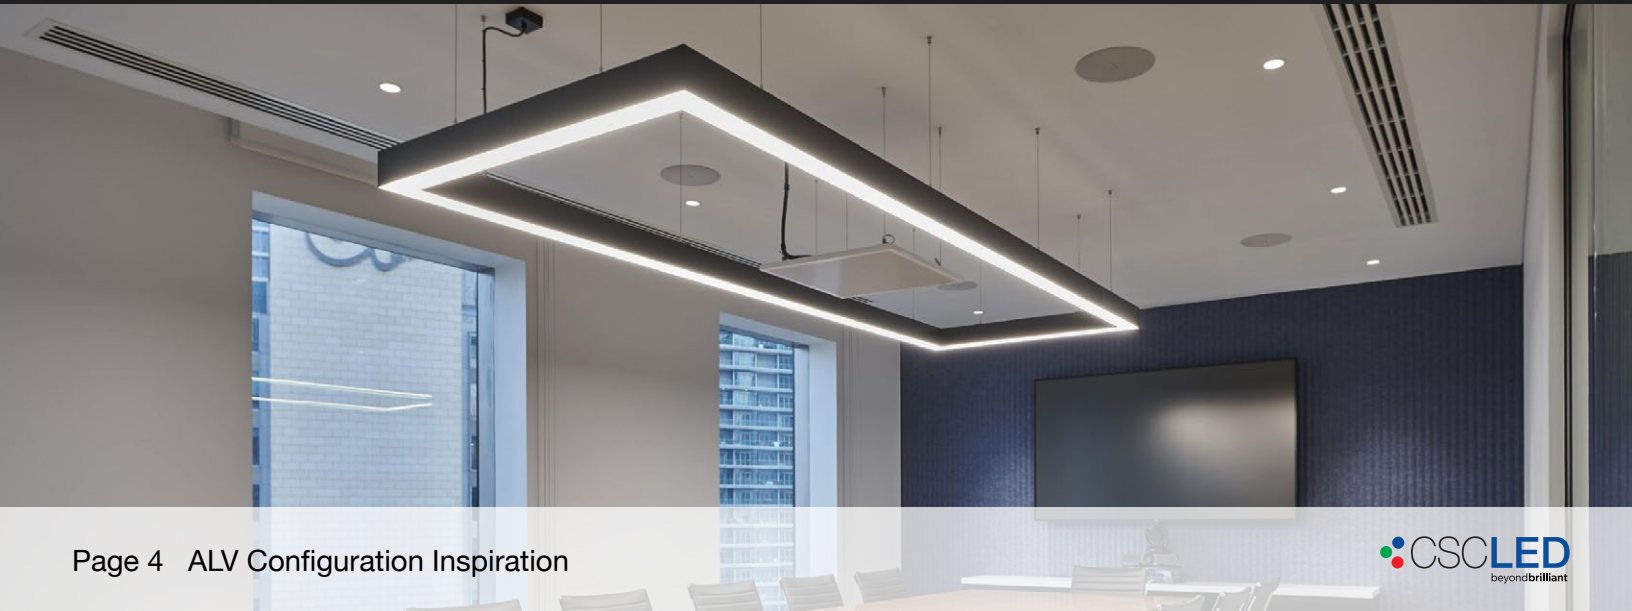


H Configurations

Parts Required for Configuration:

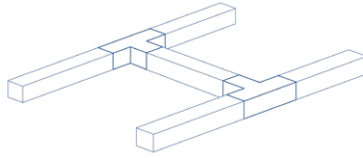


2' ALV

QTY	Product #
5	ALV-2-DI-25W-3P-5CCT-UD
2	ALV-CON-T (T Connector)
3	ALV-SUS (Suspension Kit)
1	ALV-CORD (Power Cord)
5	ALV-CPY (Canopy) Optional
5 x 2	ALV-LENS-FR-1FT (Seamless Lens) Optional



4' ALV

QTY	Product #
5	ALV-4-DI-50W-3P-5CCT-UD
2	ALV-CON-T (T Connector)
3	ALV-SUS (Suspension Kit)
1	ALV-CORD (Power Cord)
5	ALV-CPY (Canopy) Optional
9 x 2	ALV-LENS-FR-1FT (Seamless Lens) Optional

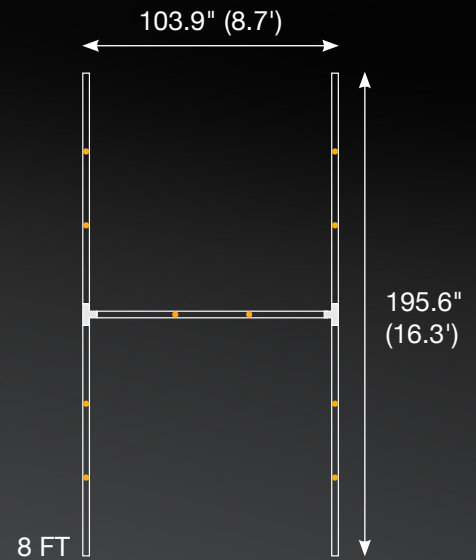

8' ALV



QTY	Product #
5	ALV-8-DI-100W-3P-5CCT-UD
2	ALV-CON-T (T Connector)
5	ALV-SUS (Suspension Kit)
2 (120V)	ALV-CORD (Power Cord)
1 (347V)	ALV-CORD (Power Cord)
5	ALV-CPY (Canopy) Optional
17 x 2	ALV-LENS-FR-1FT (Seamless Lens) Optional

Note: Yellow dots indicate the minimum required mounting points and estimated mounting positions. See page 3 for minimum, maximum, and ideal mounting distances.




Square Configurations

Parts Required for Configuration:




2' ALV

QTY	Product #
4	ALV-2-DI-25W-3P-5CCT-UD
4	ALV-CON-L (90° Connector)
2	ALV-SUS (Suspension Kit)
1	ALV-CORD (Power Cord)
4	ALV-CPY (Canopy) Optional



4' ALV

QTY	Product #
4	ALV-4-DI-50W-3P-5CCT-UD
4	ALV-CON-L (90° Connector)
2	ALV-SUS (Suspension Kit)
1	ALV-CORD (Power Cord)
4	ALV-CPY (Canopy) Optional


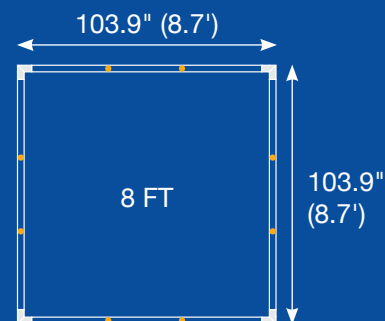


8' ALV

QTY	Product #
4	ALV-8-DI-100W-3P-5CCT-UD
4	ALV-CON-L (90° Connector)
4	ALV-SUS (Suspension Kit)
1	ALV-CORD (Power Cord)
4	ALV-CPY (Canopy) Optional


X Configurations

Parts Required for Configuration:




2' ALV

QTY	Product #
4	ALV-2-DI-25W-3P-5CCT-UD
1	ALV-CON-X (X Connector)
2	ALV-SUS (Suspension Kit)
1	ALV-CORD (Power Cord)
4	ALV-CPY (Canopy) Optional

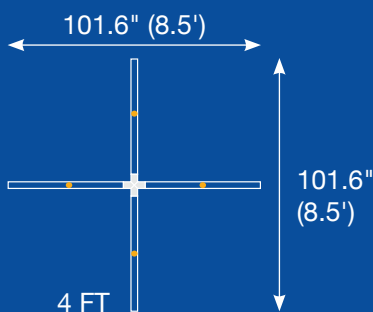

4' ALV

QTY	Product #
4	ALV-4-DI-50W-3P-5CCT-UD
1	ALV-CON-X (X Connector)
2	ALV-SUS (Suspension Kit)
1	ALV-CORD (Power Cord)
4	ALV-CPY (Canopy) Optional

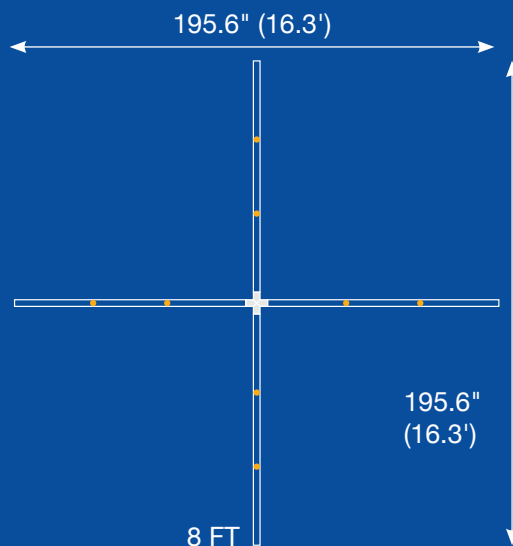



8' ALV

QTY	Product #
4	ALV-8-DI-100W-3P-5CCT-UD
1	ALV-CON-X (X Connector)
4	ALV-SUS (Suspension Kit)
1	ALV-CORD (Power Cord)
4	ALV-CPY (Canopy) Optional

Note: Yellow dots indicate the minimum required mounting points and estimated mounting positions. See page 3 for minimum, maximum, and ideal mounting distances.

Lightning Bolt Configurations

Parts Required for Configuration:

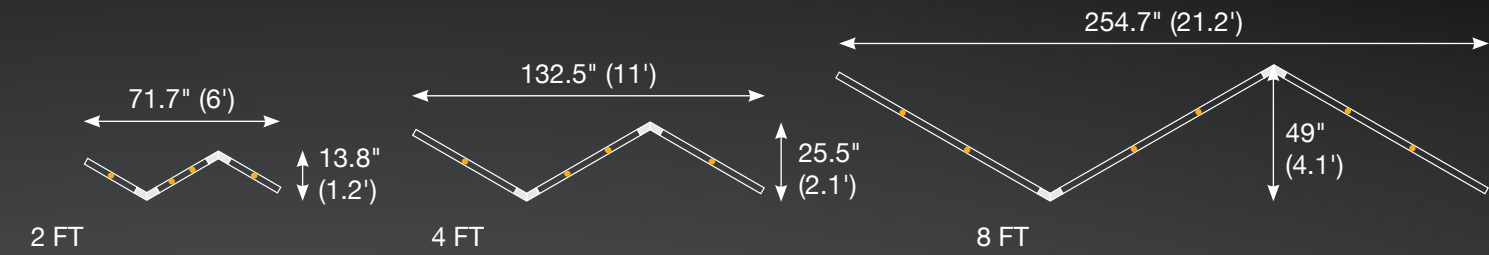

2' ALV	
QTY	Product #
3	ALV-2-DI-25W-3P-5CCT-UD
2	ALV-CON-V (V Connector)
2	ALV-SUS (Suspension Kit)
1	ALV-CORD (Power Cord)
3	ALV-CPY (Canopy) Optional

4' ALV	
QTY	Product #
3	ALV-4-DI-50W-3P-5CCT-UD
2	ALV-CON-V (V Connector)
2	ALV-SUS (Suspension Kit)
1	ALV-CORD (Power Cord)
3	ALV-CPY (Canopy) Optional



8' ALV	
QTY	Product #
3	ALV-8-DI-100W-3P-5CCT-UD
2	ALV-CON-V (V Connector)
3	ALV-SUS (Suspension Kit)
1	ALV-CORD (Power Cord)
3	ALV-CPY (Canopy) Optional

Note: Yellow dots indicate the minimum required mounting points and estimated mounting positions. See page 3 for minimum, maximum, and ideal mounting distances.



Hexagon Configurations

Parts Required for Configuration:

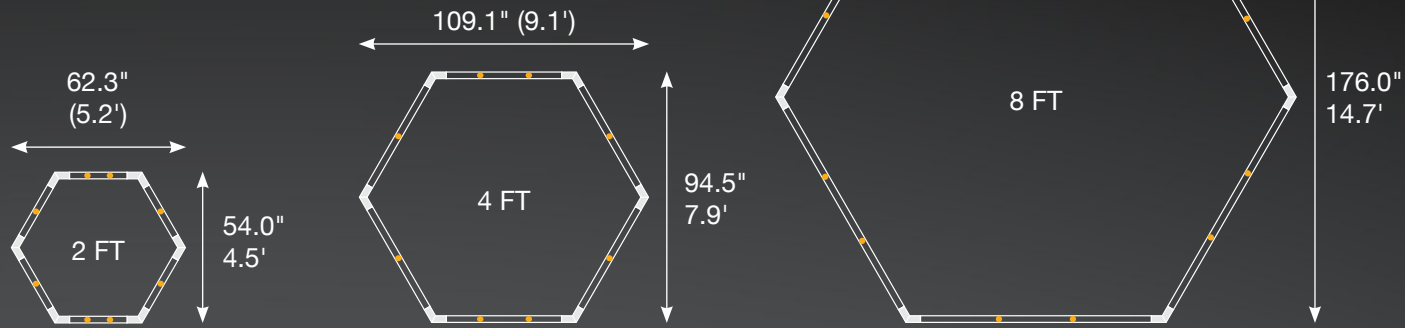


2' ALV	
QTY	Product #
6	ALV-2-DI-25W-3P-5CCT-UD
6	ALV-CON-V (V Connector)
4	ALV-SUS (Suspension Kit)
1	ALV-CORD (Power Cord)
6	ALV-CPY (Canopy) Optional

4' ALV	
QTY	Product #
6	ALV-4-DI-50W-3P-5CCT-UD
6	ALV-CON-V (V Connector)
4	ALV-SUS (Suspension Kit)
1	ALV-CORD (Power Cord)
6	ALV-CPY (Canopy) Optional

8' ALV	
QTY	Product #
6	ALV-8-DI-100W-3P-5CCT-UD
6	ALV-CON-V (V Connector)
6	ALV-SUS (Suspension Kit)
2 (120V)	ALV-CORD (Power Cord)
1 (347V)	ALV-CORD (Power Cord)
6	ALV-CPY (Canopy) Optional

Note: Yellow dots indicate the minimum required mounting points and estimated mounting positions. See page 3 for minimum, maximum, and ideal mounting distances.



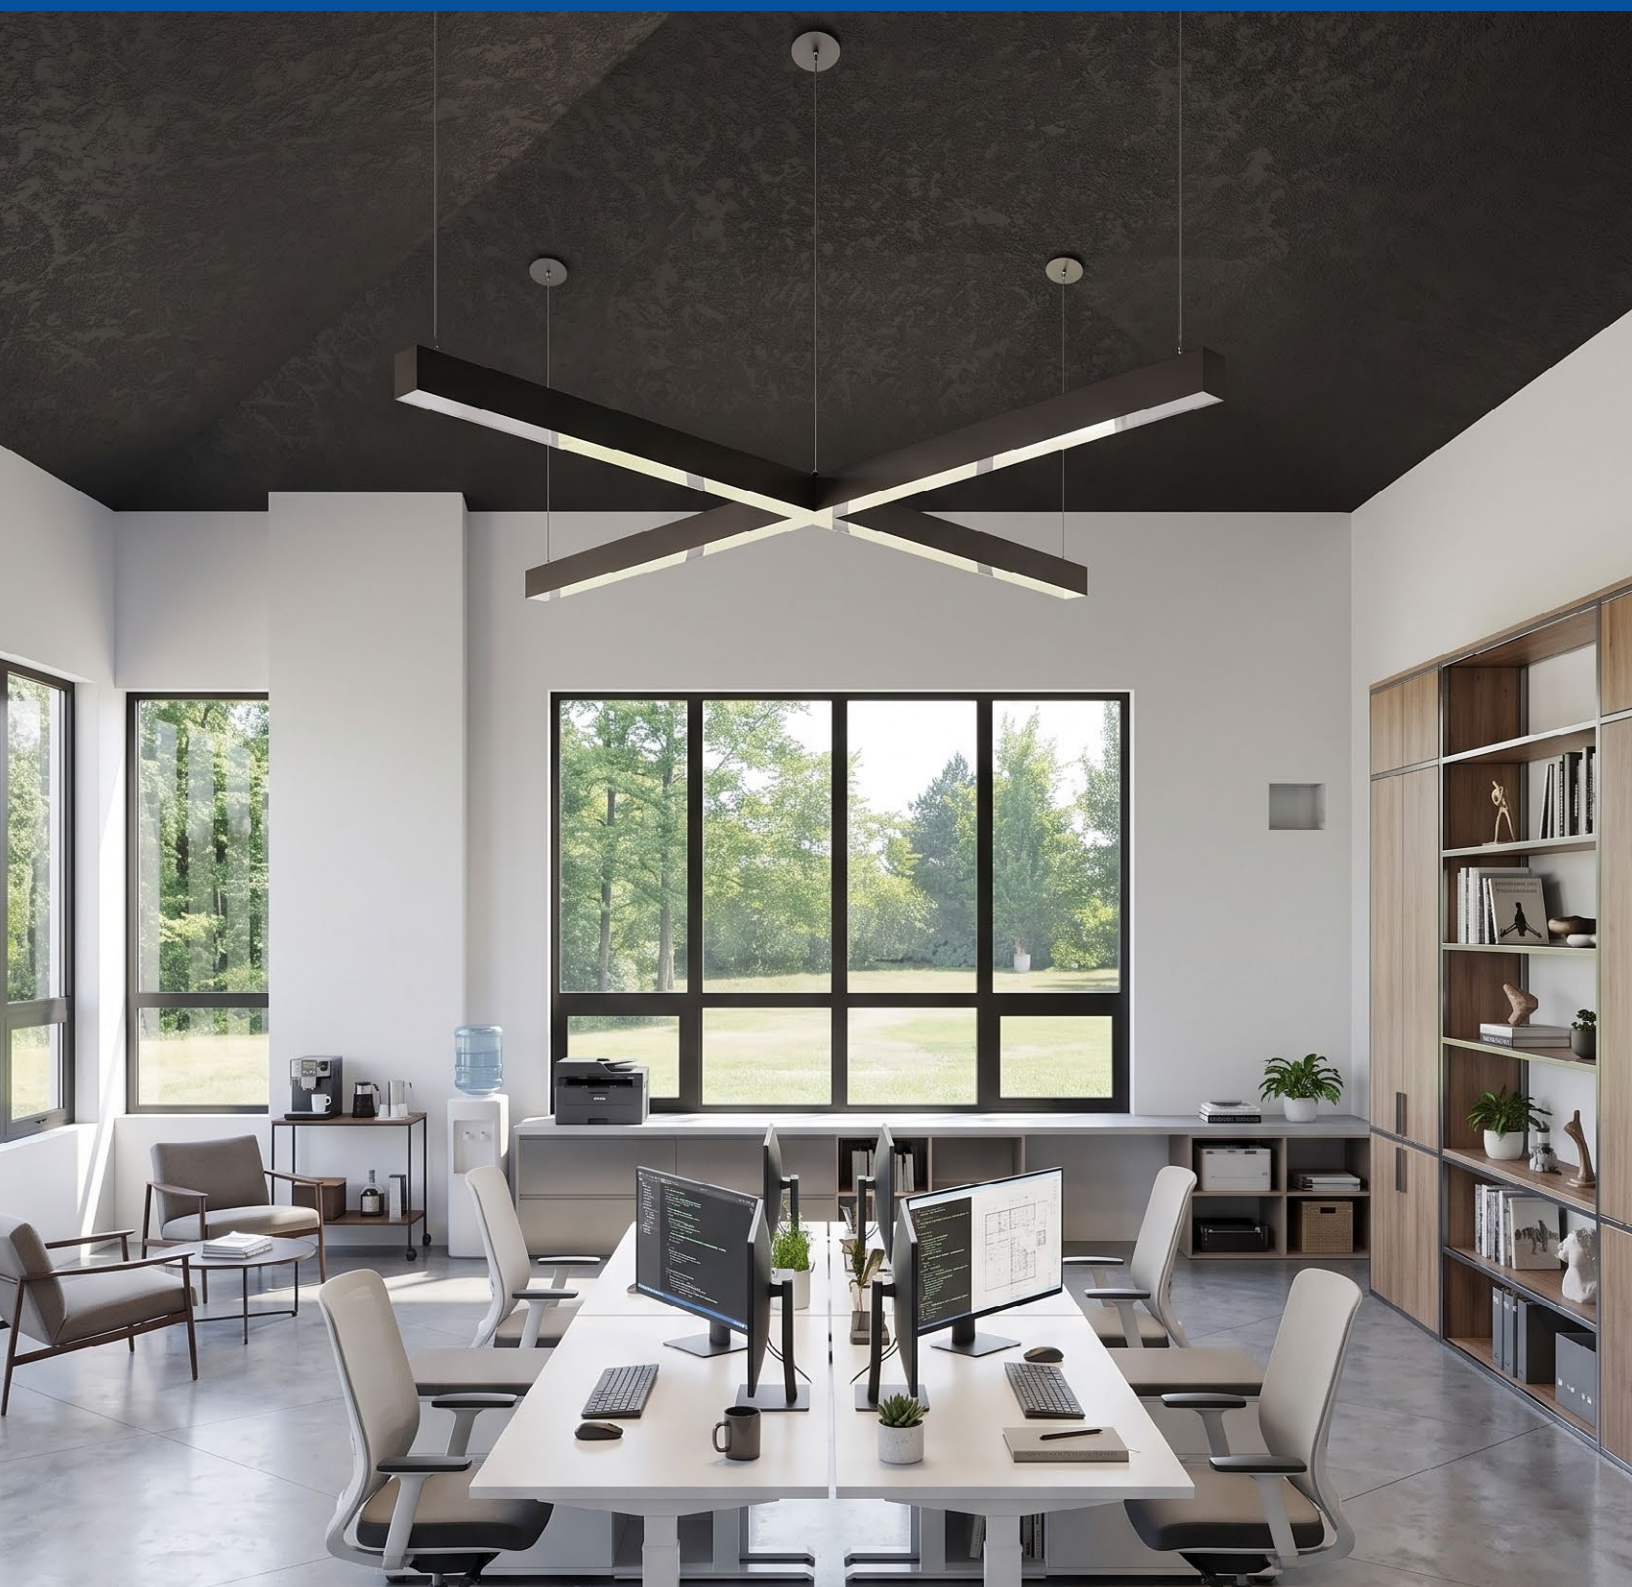

BC BRANCH

1140-2375 Fremont St
Port Coquitlam, BC V3B 0N9
(778) 730-0448

AB BRANCH

13-2355 52 Ave SE
Calgary, AB T2C 4X7
(403) 907-0212

ON HEAD OFFICE

8-540 Jamieson Pkwy
Cambridge, ON N3C 0G5
(519) 880-9833