




AWP05 Series

ARCHITECTURAL WALL PACKS

Built for Flexibility and Performance

AWP05 ARCHITECTURAL WALL PACKS

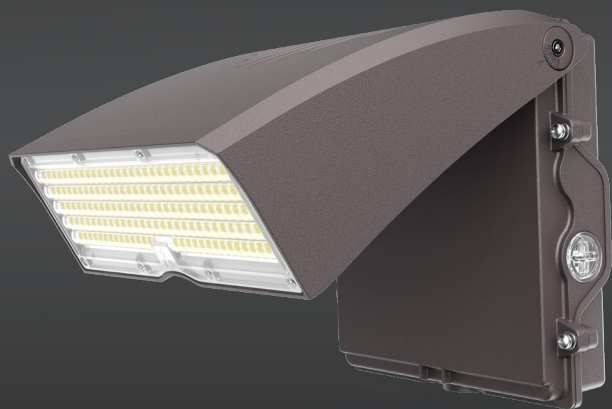

KEY FEATURES

Power Selectable

4 power settings per fixture

3CCT Selectable

3000K / 4000K / 5000K

120-347V Universal Driver

0-10V dimming

Adjustable 0-90°

for precise aiming

Built-in Photocell

unplug to bypass

Junction Box Mount with Conduit Entries

UV-Resistant Polycarbonate Refractor Lens with Type III distribution

Built-in Water Drainage



FLEXIBILITY AND CONTROL

Easily configure power, photocell, and CCT settings on-site with field-accessible integrated switches, giving you complete control over output and ambiance. The adjustable 0-90° head allows for precise light direction, ensuring the right focus for every application, and a built-in photocell for automatic dusk-to-dawn operation.

AWP05 ARCHITECTURAL WALL PACKS

Illuminate with precision and style with AWP05 Architectural Wall Packs. The AWP05 is the next evolution in outdoor lighting solutions. Perfect for building perimeters, entrances, walkways, schools, and multi-use facilities, it delivers powerful illumination while maintaining a clean, architectural look that complements any exterior.




AWP05 Wall Packs


Fixtures	Wattage	CCT	Voltage	Lumens	Finish
AWP05-40W-3CCT-4P-UD	15W / 20W / 30W / 40W	3000K / 4000K / 5000K	120-347V	2237-5955 lm	Bronze
AWP05-80W-3CCT-4P-UD	40W / 50W / 60W / 80W	3000K / 4000K / 5000K	120-347V	6258-12226 lm	Bronze
AWP05-120W-3CCT-4P-UD	80W / 90W / 100W / 120W	3000K / 4000K / 5000K	120-347V	9992-18560 lm	Bronze



40W/80W



120W

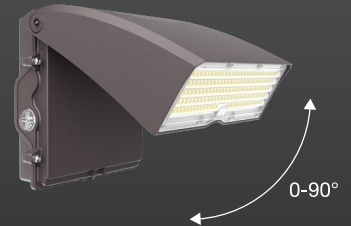

Lumen Output Tables

and Product Numbers

AWP05-40W-3CCT-4P-UD			
	3000K	4000K	5000K
15W	2237 lm	2308 lm	2378 lm
20W	3130 lm	3272 lm	3341 lm
30W	4508 lm	4781 lm	4822 lm
40W	5834 lm	5949 lm	5955 lm

AWP05-80W-3CCT-4P-UD			
	3000K	4000K	5000K
40W	6258 lm	6584 lm	6606 lm
50W	7560 lm	8057 lm	8040 lm
60W	8998 lm	9700 lm	9610 lm
80W	12009 lm	12226 lm	12120 lm

AWP05-120W-3CCT-4P-UD			
	3000K	4000K	5000K
60W	9992 lm	10201 lm	10021 lm
90W	14011 lm	14680 lm	14108 lm
100W	15306 lm	16197 lm	15507 lm
120W	18377 lm	18560 lm	18468 lm



For information on the complete series including IES files, spec sheets, and more, visit www.csc-led.com

www.csc-led.com | info@csc-led.com | [cscledcorp](http://cscledcorp.com)





BC BRANCH

1140-2375 Fremont St
Port Coquitlam, BC V3B 0N9
(778) 730-0448

AB BRANCH

13-2355 52 Ave SE
Calgary, AB T2C 4X7
(403) 907-0212

ON HEAD OFFICE

8-540 Jamieson Pkwy
Cambridge, ON N3C 0G5
(519) 880-9833