

Explosion-Proof High Bays



Certified Class 1, Div 2 (Groups A, B, C, D)

Suitable for hazardous environments where flammable gases or vapours, flammable liquids, and combustible dust and/or ignitable fibers may exist. Also suited for wet locations, marine environments, and high vibration applications.

EXPR SERIES

IP66 Driver In
Separate Compartment
10KV surge protection

Complete with
1m Power Cord



Complete With
Yoke Mount


Tempered Glass Lens
allows for soft, uniform light

EXPL SERIES

3 x 3/4" NPT
Conduit Entry Points
for added flexibility

Optional Yoke Mount
Ordered Separately
EXPL-YK

Suspension Kit
Included

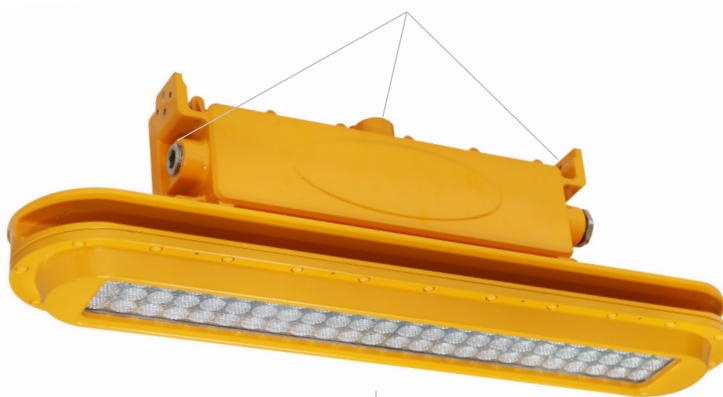

Faceted Reflectors
in each LED chip for glare
control and beam precision



Round Explosion-Proof High Bay



PRODUCT #	WATTS	VOLTAGE	CCT	LUMENS	EFFICACY	COLOUR
EXPR-60W-50K	60W	120-277V	5000K	8,870 lm	130 lm/W	Orange
EXPR-100W-50K	100W	120-277V	5000K	15,967 lm	130 lm/W	Orange
EXPR-150W-50K	150W	120-277V	5000K	23,834 lm	130 lm/W	Orange

EXPR-WG-SM	Wire Guard for 60W EXPR Fixtures
EXPR-WG-LG	Wire Guard for 100W/150W EXPR Fixtures



EXPR-60W-50K



EXPR-WG-SM



EXPR-100W-50K
EXPR-150W-50K



EXPR-WG-LG

Linear Explosion-Proof High Bay



PRODUCT #	WATTS	VOLTAGE	CCT	LUMENS	EFFICACY	LENGTH
EXPL-40W-2FT-50K	40W	120-277V	5000K	5,881 lm	130 lm/W	2 ft
EXPL-80W-4FT-50K	80W	120-277V	5000K	11,202 lm	130 lm/W	4 ft

EXPL-YK	Yoke Mount for EXPL Fixtures
EXPL-WG-2FT	Wire Guard for 40W EXPL Fixtures
EXPL-WG-4FT	Wire Guard for 80W EXPL Fixtures



EXPL-40W-2FT-50K



EXPL-WG-2FT



EXPL-80W-4FT-50K



EXPL-WG-4FT



View IES files and product sheets at www.csc-led.com
Contact your local CSC LED representative for more information.