


Architectural Wall Pack

120W | 4000K | 120-277V



High-end style with super bright, energy efficient LEDs
Ideal for building entrances, multi-use facilities, apartment buildings,
institutions, schools, stairways and loading docks

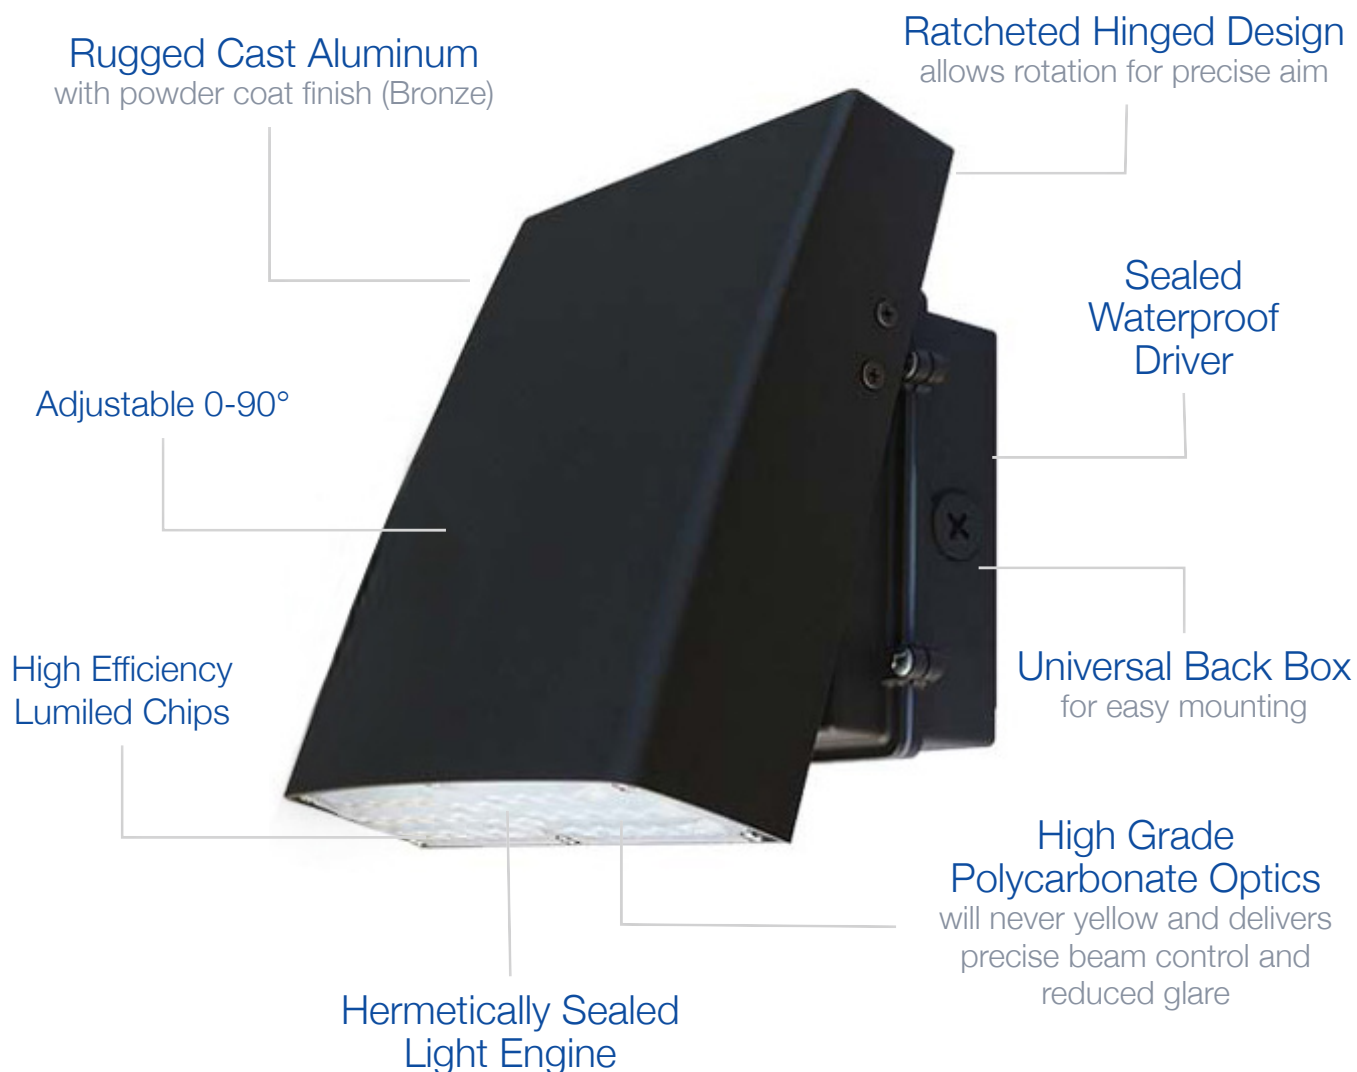

TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	13,796 lm
Efficacy	111.4 lm/W
CCT	4000K
CRI	83.5
Beam Angle	90 x 120
L70 Life	50,000 hrs
Dimmable	No
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC	PD2ZYW4H


ELECTRICAL

Wattage	120W
Voltage	120-277V
Power Factor	0.93
THD	13.26%
Operating Temp	-40 to 40°C


CONSTRUCTION

Housing	Aluminum
Finish	Multi-coat, powder
Colour	Bronze
IP Rating	IP65
Weight	10.6 lbs
Carton Qty	2

ILLUMINANCE AT A DISTANCE

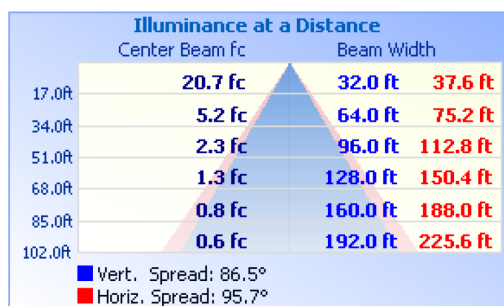

ISOCANDELA PLOT

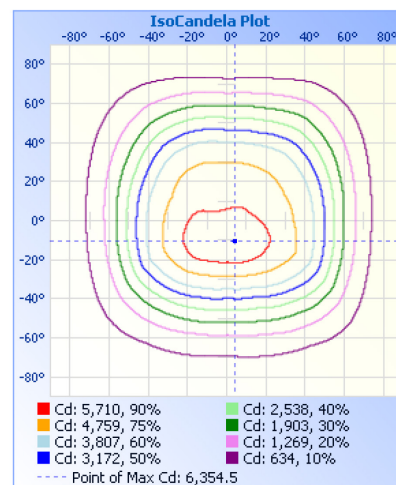

DIMENSIONS

