

CWP03 40W Wall Pack, HV

CWP03 Wall Packs

Ideal for security, warehouse, and entryway lighting

High impact polycarbonate optics
for precision beam control
and vandal resistance

Purpose-built
LED driver inside



LM80 tested
Lumiled chips

Heavy die-cast
aluminum body

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	5,587 lm
Efficacy	136.69 lm/W
CCT	4000K
CRI	83.7
Dimmable	0-10V
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E482965
DLC	PJJ2FJYQ

ILLUMINANCE AT A DISTANCE

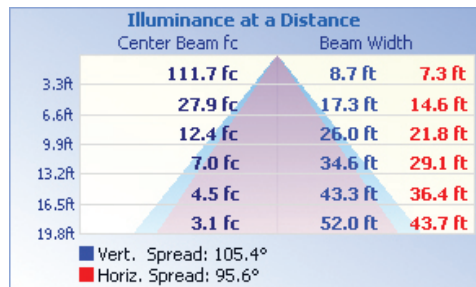

ISOCANDELA PLOT

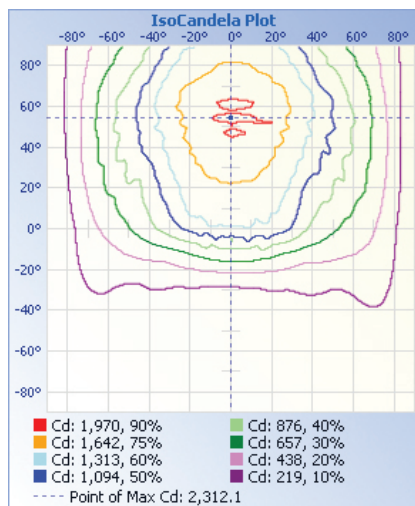

ELECTRICAL

Wattage	40W
Voltage	277-480V
Power factor	0.89
THD	12.86%
Operating temp	-40° to 40°C

CONSTRUCTION

Housing	Aluminum / Polycarbonate
Colour	Bronze
IP rating	IP65
Weight	6.28 lbs
Carton qty	1

DIMENSIONS

