CWP03 40W Wall Pack

CWP03 Wall Packs
Ideal for security, warehouse, and entryway lighting

High impact polycarbonate optics
for precision beam control
and vandal resistance

Purpose-built
LED driver inside

LM80 tested
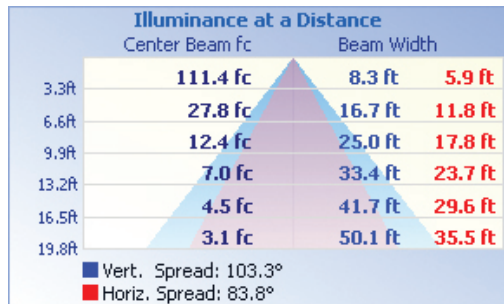Lumiled chips

Heavy die-cast
aluminum body

TECHNICAL DATA

LIGHT SPECIFICATIONS

Lumens	5,536 lm
Efficacy	140.24 lm/W
CCT	4000K
CRI	83.1
Dimmable	0-10V
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965

ILLUMINANCE AT A DISTANCE

ISOCANDELA PLOT
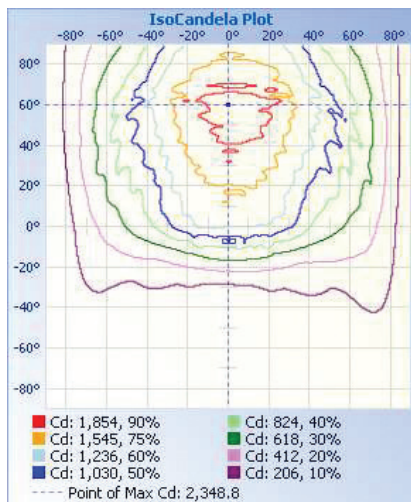
ELECTRICAL

Wattage	40W
Voltage	120-277V
Power factor	0.95
THD	8.97%
Operating temp	-40° to 40°C

CONSTRUCTION

Housing	Aluminum / Polycarbonate
Colour	Bronze
IP rating	IP65
Weight	5.86 lbs
Carton qty	1

DIMENSIONS