

CWP04 Wall Pack

60W | Colour Tunable | 120-347V



Ideal for entryway and exterior security lighting

Easy installation and maintenance with colour temperature and voltage options

Built-in Photocell
(can be bypassed with switch)

120-347V Driver
with 6kV surge protection

**Instant Start, Soft,
Uniform Light**




Colour Tunable
3000K/4000K/5000K

**Durable Die-Cast
Aluminum Housing**

**Borosilicate
Glass Lens**

Optional Accessories (sold separately):
Wireguard, Visor, Motion Sensor, Remote



CWP04-WG



CWP04-VISOR



HB01DMS-C



HB01R

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	8,208 lm
Efficacy	139.5 lm/W
CCT	3000K / 4000K / 5000K
CRI	82
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E482965
DLC	PLLOJVTP6PYH

ILLUMINANCE AT A DISTANCE

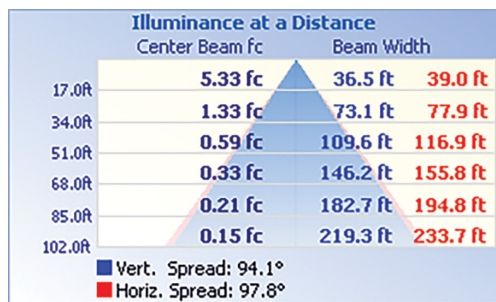

ISOCANDELA PLOT

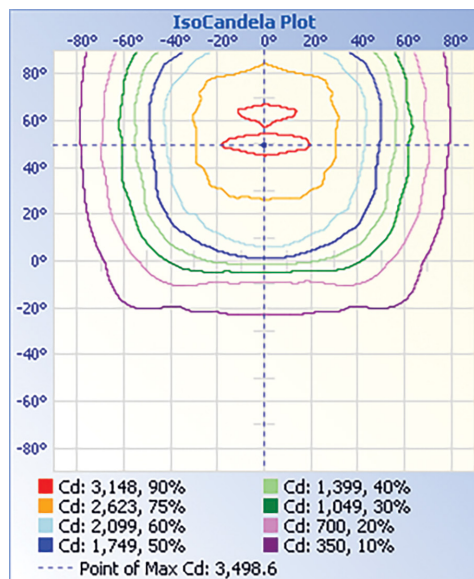

ELECTRICAL

Wattage	60W
Voltage	120-347V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 50°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Borosilicate Glass
Finish	Bronze
IP Rating	IP65
Net Weight	3.5 kg
Gross Weight	4.5 kg
Carton Qty	1
Carton Dimensions	397 x 297 x 250 mm

ACCESSORIES (Ordered Separately)

Visor	CWP04-VISOR
Motion Sensor	HB01DMS-C
Remote	HB01R
Wireguard	CWP04-WG

Note: HB01R (remote) is **required** for HB01DMS-C (motion sensor)

DIMENSIONS

