

450W Flood / Area Light



NEW FL04 Series

Sleek, streamlined design with premium performance



LM80
Tested Chips

Polyester
Powder Coat Finish
Bronze Standard

Highest Grade
Polycarbonate Optics
Type III Standard
Type V Available

Trunnion Mount Standard
Field-Interchangeable:
Universal Slip Fitter
(sold separately)

Options available (sold separately):

Universal
Slip Fitter

Photocell



SLIPFIT-UV

FLPC-LV

TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	54,464 lm
Efficacy	125.38 lm/W
CCT	4000K
CRI	73.8
L70 Life	54,000
Warranty	10-year

ELECTRICAL

Wattage	450W
Voltage	120-277V
Power factor	0.92
THD	11.52%
Operating temp	-40 to 40°C


APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLD9AKJ7EGNI


CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder coat
Colour	Bronze
IP rating	IP65
EPA rating	45° - 2.34 ft ² Horizontal - 1.4 ft ² Vertical - 3.2 ft ²
Weight	27.3 lbs
Carton qty	1


ILLUMINANCE AT A DISTANCE

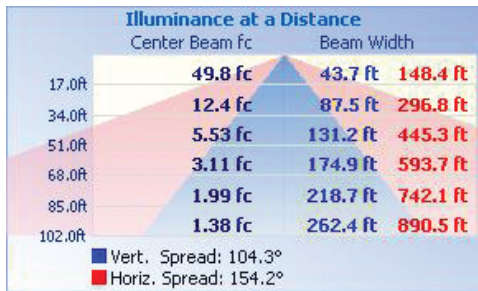

DIMENSIONS

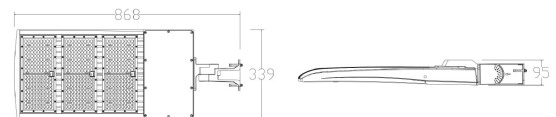

ISOCANDELA PLOT

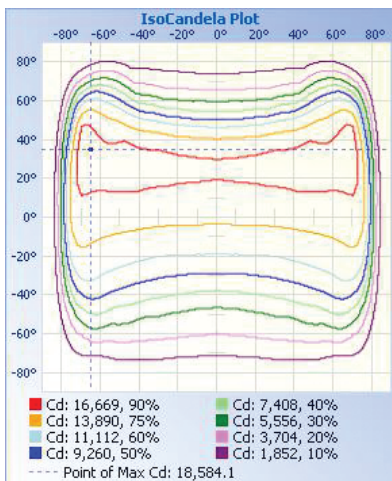

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com