

450W Flood / Area Light



NEW FL04 Series

Sleek, streamlined design with premium performance

LM80
Tested Chips

Polyester
Powder Coat Finish
Bronze Standard

Highest Grade
Polycarbonate Optics

Type III Standard
Type V Available

Trunnion Mount Standard

Field-Interchangeable:
Slip Fitter, Pole, or Multi-Mount
Ordered Separately

Options available (ordered separately):

Pole Mount



FL04-PM

Multi Mount



FL04-MM

Slip Fit Mount



FL04-SF

Motion Sensor or Photocell



FL04-MMS-KIT

FLPC-LV

TECHNICAL DATA




LIGHT SPECIFICATIONS

| | |
|----------|-------------|
| Lumens | 55,443 lm |
| Efficacy | 127.31 lm/W |
| CCT | 5000K |
| CRI | 70 |
| L70 Life | 54,000 |
| Warranty | 10-year |

APPROVALS AND LISTINGS

| | |
|-----|---------|
| cUL | E482965 |
|-----|---------|

ILLUMINANCE AT A DISTANCE

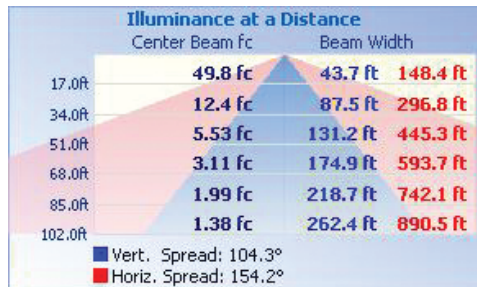


ELECTRICAL

| | |
|----------------|-------------|
| Wattage | 450W |
| Voltage | 120-277V |
| Power factor | 0.90 |
| THD | 15% |
| Operating temp | -40 to 40°C |


CONSTRUCTION

| | |
|------------|--|
| Housing | Aluminum alloy |
| Finish | Polyester powder coat |
| Colour | Bronze |
| IP rating | IP65 |
| EPA rating | 45° - 2.34 ft ² Horizontal - 1.4 ft ² Vertical - 3.2 ft ² |
| Weight | 27.3 lbs |
| Carton qty | 1 |

DIMENSIONS



ISOCANDELA PLOT

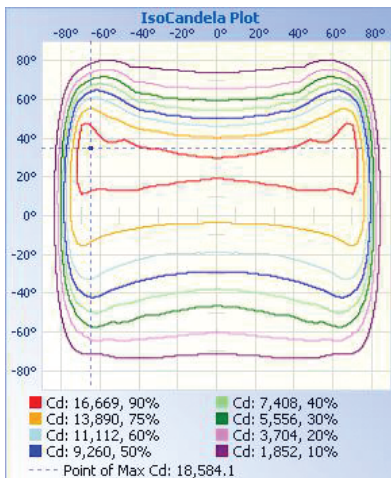

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com