

# LHB03 Linear High Bay

165W | 4000K | 120-347V



Ideal for warehouses, factories, workshops, and more  
Energy efficient replacement for traditional fluorescent fixtures and HID high bays



120-347V Driver  
with 4kV surge protection

0-10V Dimmable

Instant Start  
with no flickering  
or humming

Newly Designed,  
Shatterproof  
Polycarbonate Optics  
meet/exceed DLC 5.1  
glare standards

Centre Knockout Allows  
for Easy Installation of an  
Optional Motion Sensor  
(sold separately)

Complete with  
10' Cord Whip



Mounting Hooks Included  
2 x mounting hooks and 2 x 40" chains


Accessories (Sold Separately): Motion Sensor (MS04-MW-TW-DC),  
Motion Sensor Remote (HB01R), Wireguard (LHB-110-165-WG),  
Bracket (LHB-BRACKET-SM)



MS04-MW-TW-DC



HB01R



LHB-110-165-WG



LHB-BRACKET-SM

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	22,560 lm
Efficacy	138 lm/W
CCT	4000K
CRI	82
Dimmable	0-10V
Beam Angle	90°
L70 Life	>51,000 hrs
Warranty	5-year


### APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLY885SF7KP6

### ILLUMINANCE AT A DISTANCE

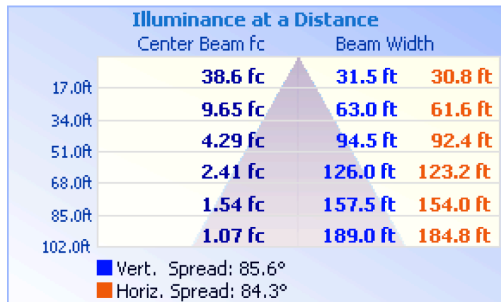

### ISOCANDELA

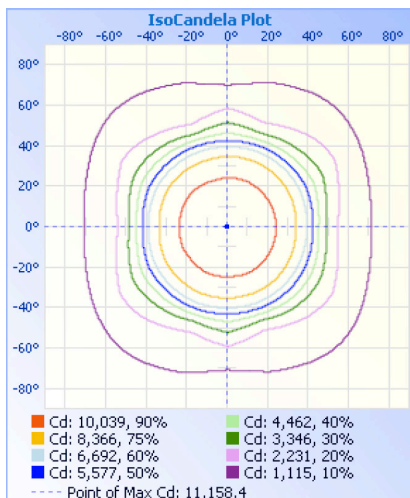

### ELECTRICAL

Wattage	165W
Voltage	120-347V
Surge Protection	4kV
Auxiliary Output	12V
Power Factor	0.9
THD	15%
Operating Temp	-25 to 50°C

### CONSTRUCTION


Housing	Steel
Finish	Powder Coat
Finish Colour	White
IP Rating	IP20
Net Weight	7.4 kg
Gross Weight	9.1 kg
Product Dimensions	630 x 300 x 48 mm
Carton Qty	2
Carton Dimensions	720 x 360 x 185 mm

### ACCESSORIES (SOLD SEPARATELY)

MS04-MW-TW-DC	Motion Sensor
HB01R	Remote for Motion Sensor
LHB-110-165-WG	Wireguard
LHB-BRACKET-SM	Pendant Mounting Bracket

**NOTE:** Remote (HB01R) is **required** for motion sensor (HB01DMS-A) to function.

### DIMENSIONS

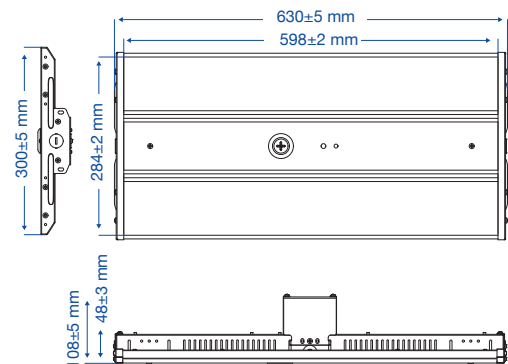

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833