

# 1'x4' Panel

20W, 30W, 40W Selectable | 3CCT | 120-347V

High performance, light-weight luminaires suitable for lay-in, surface or pendant mounting. Ideal for use in schools, health care applications, offices, retail spaces, and more

Less than 1.8" Deep  
ideal for tight plenum areas

0-10V Dimming Lead on Both  
Sides of Driver Junction Box

Non-yellowing  
Frosted Lens

120-347V, 0-10V  
Dimmable Driver



Colour Selectable  
(3500K/4000K/5000K)


Wattage Selectable  
(20W / 30W / 40W)



Seismic Clips  
Included

Waffle Stamping  
increases heat dissipation and driver life

Use Switches to Select  
Power & Colour

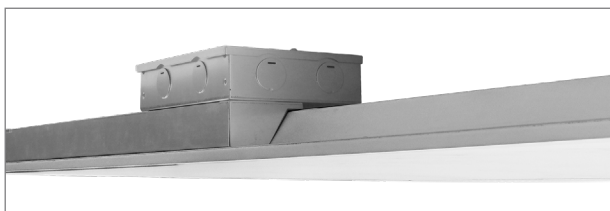

Junction Box (PLS-JB)  
sold separately

Accessories (Sold Separately)



Suspension Kit  
PLS-SUSKIT



Surface Mount Kit  
PLS14-SK



Junction Box  
PLS-JB



Recessed Frame Kit  
PLS14-RFK

## TECHNICAL DATA



### LIGHT SPECIFICATIONS


|            |                   |
|------------|-------------------|
| Lumens     | 4,335 lm          |
| Efficacy   | 112 lm/W          |
| CCT        | 3500K/4000K/5000K |
| CRI        | >80               |
| Dimmable   | 0-10V             |
| Beam Angle | 120°              |
| L70 Life   | >54,000 hrs       |
| Warranty   | 7-year            |

|     | 3500K   | 4000K   | 5000K   |
|-----|---------|---------|---------|
| 20W | 2646 lm | 2730 lm | 2656 lm |
| 30W | 3689 lm | 3891 lm | 3766 lm |
| 40W | 4335 lm | 4697 lm | 4361 lm |

### APPROVALS AND LISTINGS

|     |         |
|-----|---------|
| ETL | 5000444 |
|-----|---------|

### DIMENSIONAL DRAWINGS (IN)

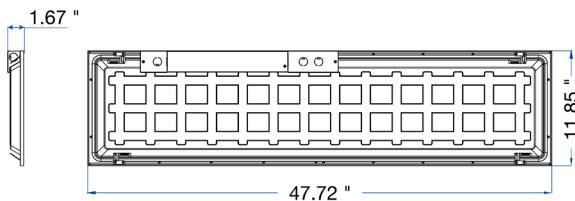

### ELECTRICAL

|                |                          |
|----------------|--------------------------|
| Wattage        | Selectable (20W/30W/40W) |
| Voltage        | 120-347V                 |
| Power Factor   | 0.98                     |
| Current        | 0.44A                    |
| THD            | <20%                     |
| Operating Temp | -20 to 40°C              |

### CONSTRUCTION

|               |                       |
|---------------|-----------------------|
| Housing       | Metal                 |
| Finish        | Polyester Powder Coat |
| Finish Colour | White                 |
| IP Rating     | IP20                  |

### DIMENSIONS & WEIGHTS

|                    |                      |
|--------------------|----------------------|
| Fixture Weight     | 4.4 lbs              |
| Fixture Dimensions | 47.72 x 1.67 x 11.85 |
| Carton Qty         | 4 pcs                |
| Carton Weight      | 19.5 lbs             |
| Carton Dimensions  | 48.7" x 7" x 13.1"   |

### ACCESSORIES (SOLD SEPARATELY)

|            |                    |
|------------|--------------------|
| PLS14-SK   | Surface Mount Kit  |
| PLS14-RFK  | Recessed Frame Kit |
| PLS-SUSKIT | Suspension Kit     |
| PLS-JB     | Junction Box       |