

Pole Top Area Light

150W | Colour Selectable | 120-347V



Elegant look and design
Ideal for parking lots, pathways, parks, retail settings, and more

Colour Selectable
3000K / 4000K / 5000K

Complete with Shorting Cap
Photocells sold separately

0-10V Dimmable

High Efficiency Optics
with type 5 distribution

Polyester
Powder-Coat Finish
(Bronze)

Fits Up To 3" OD pole

Instant Start



Optional Accessories (sold separately)
120-347V Photocell (JL-207E), 120-277V Photocell (JL-205LV)



JL-207E



JL-205LV

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	18,747 lm @ 3000K
Efficacy	123 lm/W
CCT	3000K / 4000K / 5000K
CRI	>80
Distribution	Type V
Beam Angle	90°
Dimmable	0-10V
L70 Life	>50,000 hours
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLK0DL289PAI

ISOCANDELA PLOT

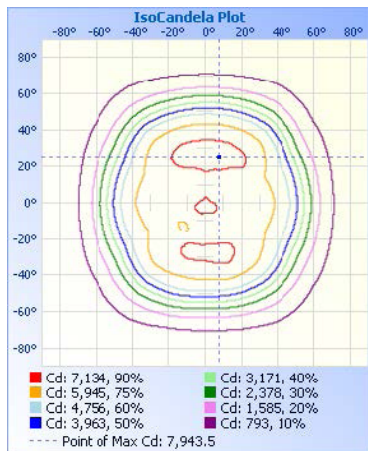

ILLUMINANCE AT A DISTANCE

Center Beam fc	Beam Width
17.0ft	26.1 fc 43.0 ft 33.3 ft
34.0ft	6.54 fc 86.0 ft 66.6 ft
51.0ft	2.90 fc 128.9 ft 100.0 ft
68.0ft	1.63 fc 171.9 ft 133.3 ft
85.0ft	1.05 fc 214.9 ft 166.6 ft
102.0ft	0.73 fc 257.9 ft 199.9 ft

■ Vert. Spread: 103.3°
■ Horiz. Spread: 88.8°

ELECTRICAL

Wattage	150W
Voltage	120-347V
Surge Protection	4kV
Power Factor	>0.9
THD	<20%
Operating temp	-40 to 45°C

CONSTRUCTION

Housing	Aluminum
Finish	Powder coated
Colour	Bronze
IP Rating	IP65
Weight	14.33 lbs
Carton qty	1

ACCESSORIES (SOLD SEPARATELY)

120-347V Photocell	JL-207E
120-277V Photocell	JL-205LV

DIMENSIONS

