

Pole Top Area Light

35W | Colour Selectable | 120-277V



Elegant look and design
Ideal for parking lots, pathways, parks, retail settings, and more

Colour Selectable
3000K / 4000K / 5000K

Twist Lock Photocell Receptacle
and Photocell Included
Shorting cap sold separately

0-10V Dimmable

High Efficiency Optics
with type 5 distribution

Polyester
Powder-Coat Finish
(Bronze)

Fits Up To 3" OD pole



Approved by International
Dark Sky Association
when set for 3000K operation



Optional Accessories (sold separately)
Shorting Cap (JL-208)



JL-208

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	4,080 lm @ 3000K
Efficacy	123 lm/W
CCT	3000K / 4000K / 5000K
CRI	80
Beam Angle	90°
Dimmable	0-10V
L70 Life	50,000 hours
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PL94OYTFWVE0

ISOCANDELA PLOT

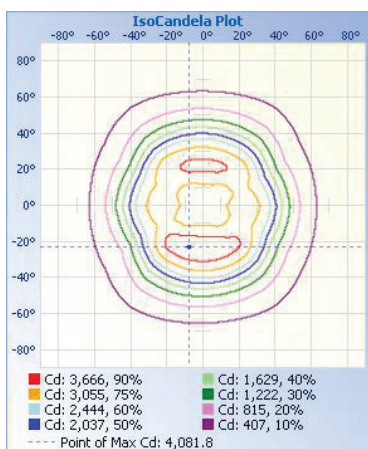

*Plotted at 3000K

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	10.4 fc	29.6 ft	22.5 ft
34.0ft	2.59 fc	59.1 ft	45.0 ft
51.0ft	1.15 fc	88.7 ft	67.5 ft
68.0ft	0.65 fc	118.3 ft	90.0 ft
85.0ft	0.41 fc	147.8 ft	112.5 ft
102.0ft	0.29 fc	177.4 ft	135.0 ft

■ Vert. Spread: 82.0°
■ Horiz. Spread: 67.0°

ELECTRICAL

Wattage	35W
Voltage	120-277V
Power Factor	0.9
THD	15%
Operating temp	-40 to 60°C


CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder-coat
Colour	Bronze
IP rating	IP65
Weight	14.33 lbs
Carton qty	1

ACCESSORIES (SOLD SEPARATELY)

Shorting Cap	JL-208
--------------	--------

DIMENSIONS

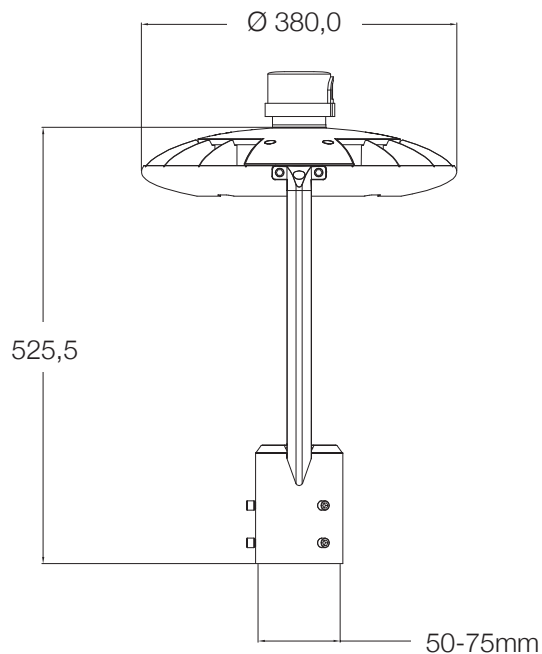

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833