

Rotatable Wall Pack

60W | 4000K | 120-277V



Ideal for security lighting, wall washing, flood lighting, and more
Use as a flood light - uplight, downlight, or both!

Heavy Die Cast Aluminum

LM80 Tested
CREE Chips

2 Independent
Rotatable Modules
offer flexible light control



270° Rotatable Modules



Superior Anodized
Paint Finish

Oversized Heat Sink
for Superior Thermal
Management

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	7,809 lm
Efficacy	128.46 lm/W
CCT	4000K
Beam angle	60°
CRI	73.8
Dimmable	No
Rated hours	50,000
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC	PLUFD2DWXNQ6

ILLUMINANCE CONE

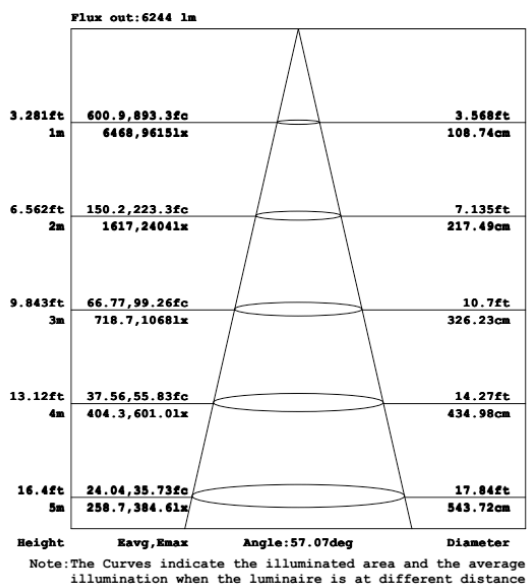

ELECTRICAL

Wattage	60W
Voltage	120-277V
Power factor	0.9
THD	12.31%
Operating temp	-30° to 45° C

CONSTRUCTION

Housing	Cast aluminum
Finish	Anodized finish
Colour	Black
IP Rating	IP65
Weight	6.68 lbs
Carton qty	2

ACCESSORIES (SOLD SEPARATELY)

RWP-EXT-PLATE	Extension Plate
---------------	-----------------



DIMENSIONS

