

Rotatable Wall Pack

60W | 5000K | 120-277V



Ideal for security lighting, wall washing, flood lighting, and more
Use as a flood light - uplight, downlight, or both!

Heavy Die Cast Aluminum

LM80 Tested
CREE Chips

2 Independent
Rotatable Modules
offer flexible light control



270° Rotatable Modules



Superior Anodized
Paint Finish

Oversized Heat Sink
for Superior Thermal
Management

TECHNICAL DATA




LIGHT SPECIFICATIONS

| | |
|-------------|-------------|
| Lumens | 7,853 lm |
| Efficacy | 129.43 lm/W |
| CCT | 5000K |
| Beam angle | 60° |
| CRI | 73.8 |
| Dimmable | No |
| Rated hours | 50,000 |
| Warranty | 10-year |

APPROVALS AND LISTINGS

| | |
|-----|--------------|
| cUL | E482965 |
| DLC | PLM7XH1EFYRU |

ILLUMINANCE CONE

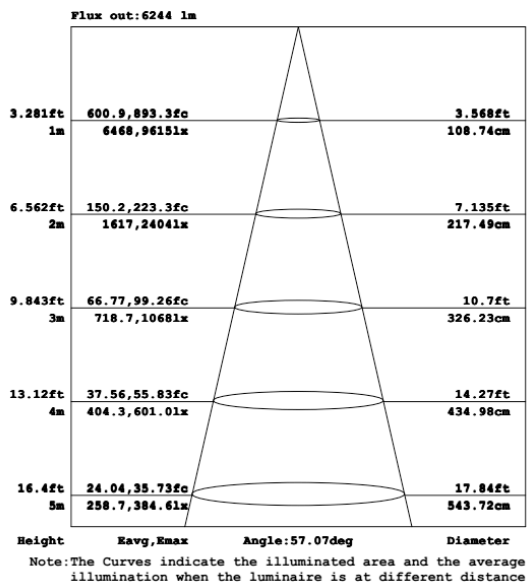

ELECTRICAL

| | |
|----------------|---------------|
| Wattage | 60W |
| Voltage | 120-277V |
| Power factor | 0.91 |
| THD | 12.31% |
| Operating temp | -30° to 45° C |

CONSTRUCTION

| | |
|------------|-----------------|
| Housing | Cast aluminum |
| Finish | Anodized finish |
| Colour | Black |
| IP Rating | IP65 |
| Weight | 6.68 lbs |
| Carton qty | 2 |

ACCESSORIES (SOLD SEPARATELY)

| | |
|---------------|-----------------|
| RWP-EXT-PLATE | Extension Plate |
|---------------|-----------------|



DIMENSIONS

