


# Rotatable Wall Packs

60W | Colour Tunable | 120-277V



Use as an uplight, downlight, or flood light  
Ideal for security lighting, wall washing, flood lighting, and more

270° Rotatable Modules

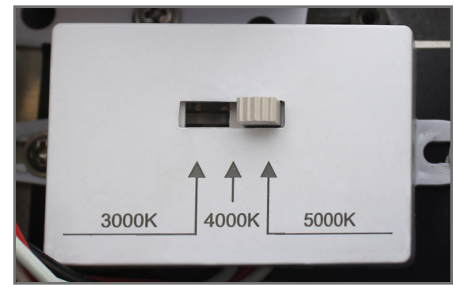

Colour Tunable via DIP Switch  
(3000K / 4000K / 5000K)

Oversized Heat Sink  
for superior thermal management

Powder Coated Finish  
(Black)

Die-cast Aluminum  
Construction

0-10V Dimmable  
with 4kV surge protection

Generously Sized Driver Box  
with multiple entry points on side  
and rear. Fits standard junction box

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	7,270.1 lm @ 3000K
Efficacy	126.02 lm/W
CCT	3000K / 4000K / 5000K
CRI	>70
Beam Angle	60°
L70 Life	>54,000 hrs
Dimmable	0-10V
Warranty	10-year


### APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLZE6LE4CKA4

### ILLUMINANCE AT A DISTANCE

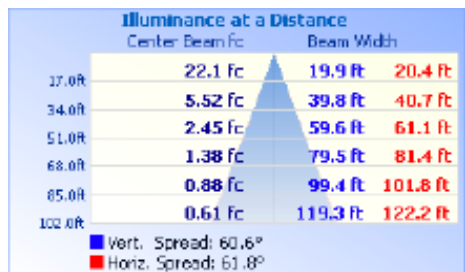

### ISOCANDELA PLOT

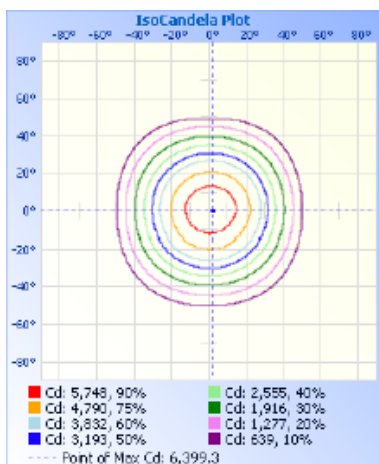


### ELECTRICAL

Wattage	60W
Voltage	120-277V
Power Factor	>0.9
THD	<15%
Operating temp	-40 to 45°C

### CONSTRUCTION

Housing	Die-cast Aluminum
Finish	Powder Coat
Finish Colour	Black
IP Rating	IP65
Gross Weight	3.05 kg
Carton Qty	2
Carton Dimensions	41.5 x 31 x 32 cm

### DIMENSIONS (MM)

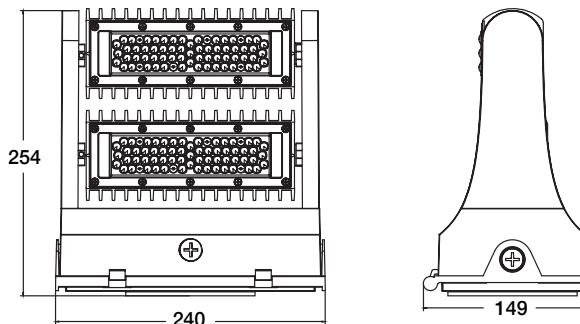

\* All specs were tested while the fixture pointed straight down.

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | [ordersbc@csc-led.com](mailto:ordersbc@csc-led.com)