

Volumetric Troffer

30W | 3500K | 2x2

Suitable for use in commercial lighting areas, such as offices, retail spaces, hallways, and hospitality areas



Damp Location Rated

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	3,780 lm
Efficacy	128 lm/W
CCT	3500K
CRI	82.8
L70 Life	50,000 hrs
Dimmable	0-10V
Warranty	5-year


APPROVALS AND LISTINGS

cUL	E491106
-----	---------

SPECTRAL POWER DISTRIBUTION

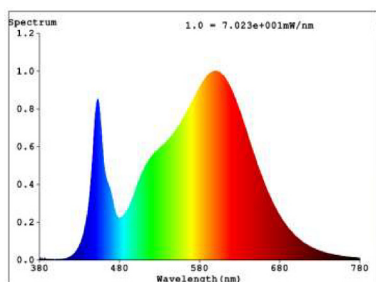

CHROMATICITY DIAGRAM

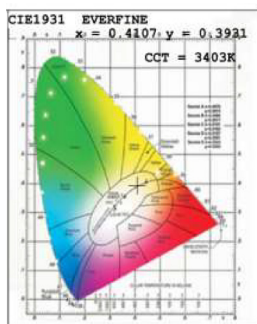

ILLUMINANCE AT A DISTANCE

Center Beam fc	Illuminance at a Distance	
	Beam Width	Beam Width
4.0ft	85.1 fc	9.8 ft 11.7 ft
8.0ft	21.3 fc	19.6 ft 23.5 ft
12.0ft	9.5 fc	29.5 ft 35.2 ft
16.0ft	5.3 fc	39.3 ft 46.9 ft
20.0ft	3.4 fc	49.1 ft 58.7 ft

■ Vert. Spread: 101.7°
■ Horiz. Spread: 111.4°


ELECTRICAL

Wattage	30W
Voltage	100-347V
Power factor	0.90
THD	11.9 %
Operating temp	-20° to 40°C

CONSTRUCTION

Housing	Steel
Finish	White
IP Rating	IP40
Weight	11.6 lbs
Carton qty	12

ISOCANDELA PLOT

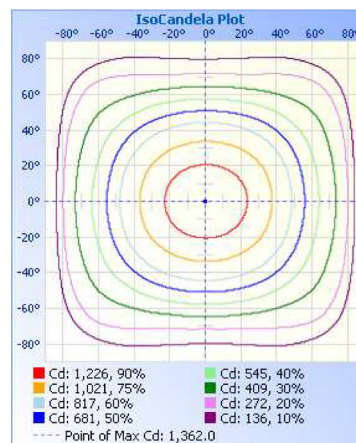

DIMENSIONS

