

# NEMA 4X Vapour Tight

36W | 4000K | 120-347V | 4 ft



Ideal for parking garages, industrial applications, agricultural applications, food processing plants, paint shops, and other harsh environments



NEMA 4X



120-347V Driver

Low Glare  
Frosted Lens



Installation Brackets

can be slid anywhere along  
entire surface for matching  
joist pattern

304 Stainless  
Steel Locking  
Buckles

One Piece  
Gear Tray  
for quick access  
to driver and  
accessories

Conduit Entry  
on both ends



Accessories (Ordered Separately):  
Motion Sensor (STVT-IMS or VTHB-IMS)  
See pg. 2 for motion sensor details



STVT-IMS



VTHB-IMS

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	4,605 lm
Efficacy	127.62 lm/W
CCT	4000K
CRI	84.8
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year


### APPROVALS AND LISTINGS

ETL	5001780
DLC	PLBLOR5UKNJO

### ILLUMINANCE AT A DISTANCE

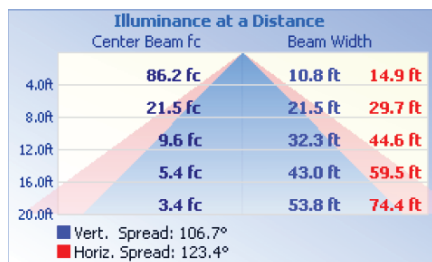

### ISOCANDELA

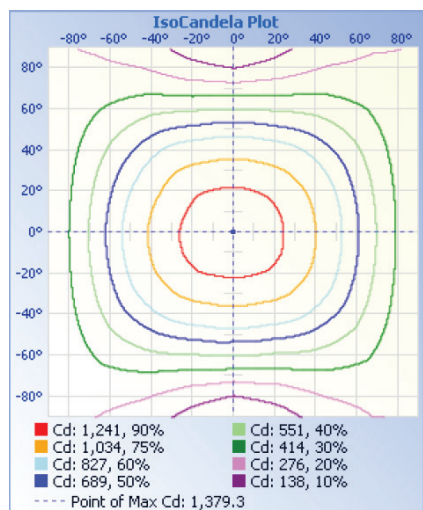

### ELECTRICAL

Wattage	36W
Voltage	120-347V
Power Factor	0.91
THD	14.25%
Operating Temp	-40 to 40°C

### CONSTRUCTION

Housing	Polycarbonate
Finish	White / Grey
IP Rating	IP66
Weight	4.4 lbs
Ctn Qty	4

### ACCESSORIES (Sold Separately)

VTHB-IMS	Motion Sensor
STVT-IMS	Motion Sensor

STVT-IMS can be mounted at a max height of 4 metres  
 VTHB-IMS can be mounted over 4 meters high (max 10m)




VTHB-IMS



STVT-IMS

### DIMENSIONS

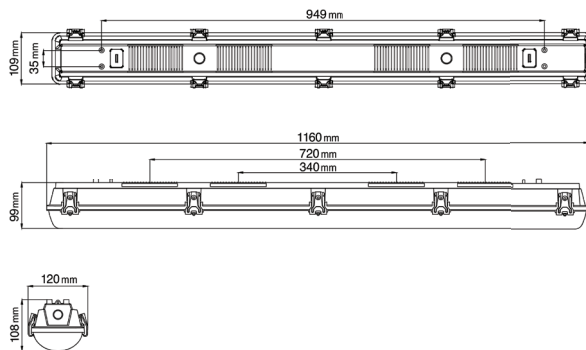

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833