

# NEMA 4X Vapour Tight

65W | CCT Tunable | 120-347V | 4 ft



Ideal for parking garages, industrial applications, agricultural applications, food processing plants, paint shops, and other harsh environments



120-347V Driver

Colour Tunable  
3500K/4000K/5000K

Low Glare  
Frosted Lens

Installation Brackets  
can be slid anywhere along  
entire surface for matching  
joist pattern

304 Stainless  
Steel Locking  
Buckles

One Piece  
Gear Tray  
for quick access  
to driver and  
accessories

Conduit Entry  
on both ends



Accessories (Ordered Separately):  
Motion Sensor (STVT-IMS or VTHB-IMS)  
*See pg. 2 for motion sensor details*



STVT-IMS



VTHB-IMS

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	8,643 lm
Efficacy	126.87 lm/W
CCT	3500K / 4000K / 5000K
CRI	84.6
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year


### APPROVALS AND LISTINGS

ETL	5001780
DLC Premium	PLF2IGOTWMPD

### ILLUMINANCE AT A DISTANCE

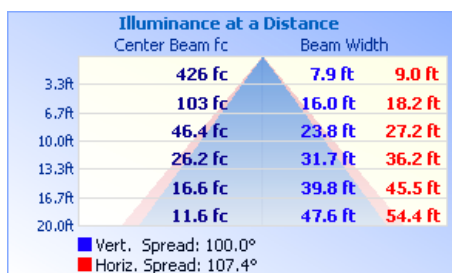

### ISOCANDELA

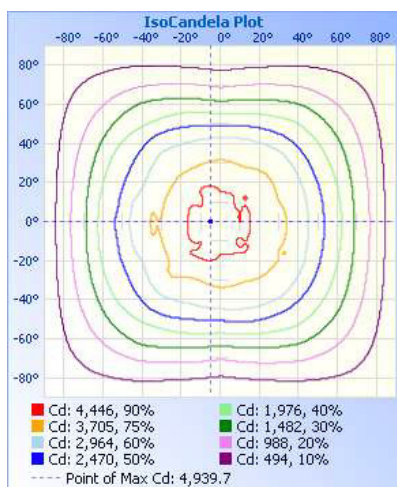

### ELECTRICAL

Wattage	65W
Voltage	120-347V
Power Factor	0.96
THD	14.38%
Operating Temp	-35 to 40°C

### CONSTRUCTION

Housing	Polycarbonate
Finish	White/Grey
Length	4 ft
IP Rating	IP66
Product Dimensions	1160 x 120 x 109 mm
Ctn Qty	4
Carton Dimensions	382 x 382 x 196 mm

### ACCESSORIES (Sold Separately)

VTHB-IMS	Motion Sensor
STVT-IMS	Motion Sensor

STVT-IMS can be mounted at a max height of 4 metres  
 VTHB-IMS can be mounted over 4 meters high (max 10m)




VTHB-IMS



STVT-IMS

### DIMENSIONS

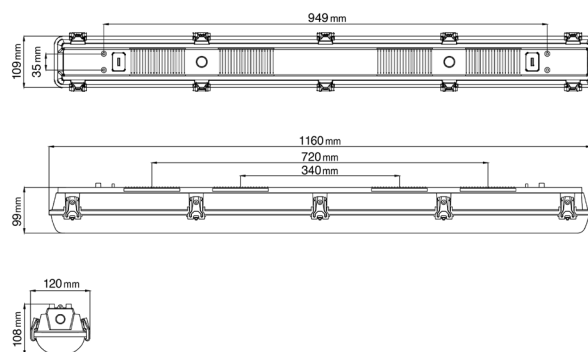

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | [ordersbc@csc-led.com](mailto:ordersbc@csc-led.com)