

NEMA 4X Vapour Tight

Power Selectable | Colour Selectable | 120-347V | 8 ft

Ideal for parking garages, car washes, industrial applications, food processing plants, paint shops, and other harsh environments



NEMA 4X



Stainless Steel Spring Clips

One Piece Gear Tray for quick access to driver and accessories

Colour Selectable
3500K / 4000K / 5000K

120-347V Driver

Polycarbonate Low Glare Lens

Power Selectable
65W / 75W / 90W / 110W



1/2" NPT Entry



Accessories (Ordered Separately): Microwave Motion Sensor (MS01-MW-HW-DC), Emergency LED Driver (BLD-YT08D)



MS01-MW-HW-DC



BLD-YT08D

TECHNICAL DATA




LIGHT SPECIFICATIONS

| | |
|----------|-----------------------|
| Lumens | 15,400 lm |
| Efficacy | 140 lm/W |
| CCT | 3500K / 4000K / 5000K |
| CRI | 83 |
| Dimmable | 0-10V |
| Life | 50,000 hrs |
| Warranty | 5-year |


APPROVALS AND LISTINGS

| | |
|-----|--------------------|
| ETL | 5001780 |
| DLC | S-PUF6XT, S-9VC8KG |

ISOCANDELA PLOT

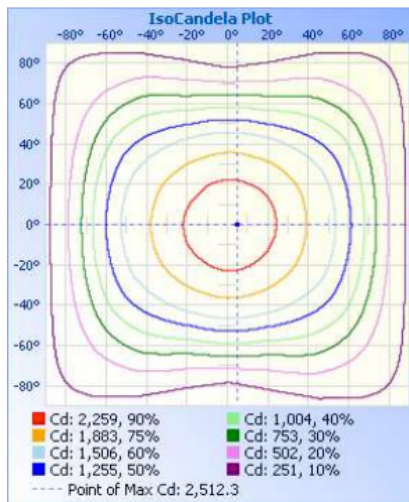

ILLUMINANCE AT A DISTANCE

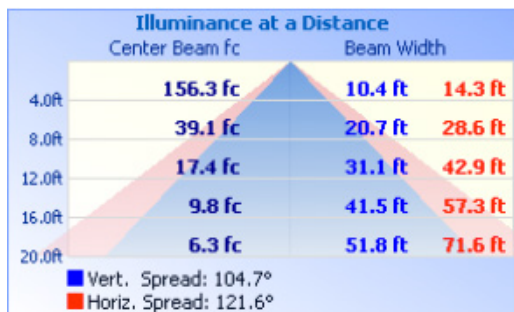

ELECTRICAL

| | |
|------------------|------------------------|
| Wattage | 65W / 75W / 90W / 110W |
| Voltage | 120-347V |
| Current | 0.55A |
| Surge Protection | 2kV |
| Auxiliary | 12V |
| Power Factor | 0.95 |
| THD | 9.5% |
| Operating Temp | -40°C to 40°C |

CONSTRUCTION

| | |
|-----------|---------------|
| Housing | Polycarbonate |
| Finish | White/Grey |
| Length | 8 ft |
| IP Rating | IP66 |

DIMENSIONS AND WEIGHTS

| | |
|---------------------|-------------------|
| Fixture Weight | 10.5 lbs |
| Fixture Dimensions | 92 x 3.3 x 4.3 in |
| Carton Qty | 1 |
| Carton Gross Weight | 12.3 lbs |
| Carton Dimensions | 94 x 4 x 4.7 in |

DIMENSIONAL DRAWING (IN)

