

380W Flood Light



Ideal for outdoor applications such as parking lots, construction sites, storage and rail yards, industrial locations, marinas, billboard/sign illumination and more



TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	45,129
Efficacy	119.36 lm/W
CCT	5000K
Beam angle	90 x 120°
CRI	82.4
Dimmable	0-10V dimmable
Rated hours	50,000
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E352127
DLC	PB6EAHM6

DIMENSIONS



ILLUMINANCE AT A DISTANCE

Distance	Illuminance at a Distance	
	Center Beam fc	Beam Width
17.0ft	57.7 fc	31.9 ft 52.7 ft
34.0ft	14.4 fc	63.7 ft 105.5 ft
51.0ft	6.4 fc	95.6 ft 158.2 ft
68.0ft	3.6 fc	127.4 ft 211.0 ft
85.0ft	2.3 fc	159.3 ft 263.7 ft
102.0ft	1.6 fc	191.1 ft 316.5 ft

■ Vert. Spread: 86.3°
■ Horiz. Spread: 114.4°

ELECTRICAL


Wattage	380W
Voltage	277-480V
Power factor	0.95
THD	8.45
Operating temp	-40° to 55°C

CONSTRUCTION

Housing	Aluminum
Finish	6mm, powder coat
Colour	Matte black
IP rating	IP65
Weight	27.5 lbs
Carton qty	1

NOTES


PHOTOMETRIC SPECS



Product #

FL01H-380W-SF

WITH SLIP FITTER

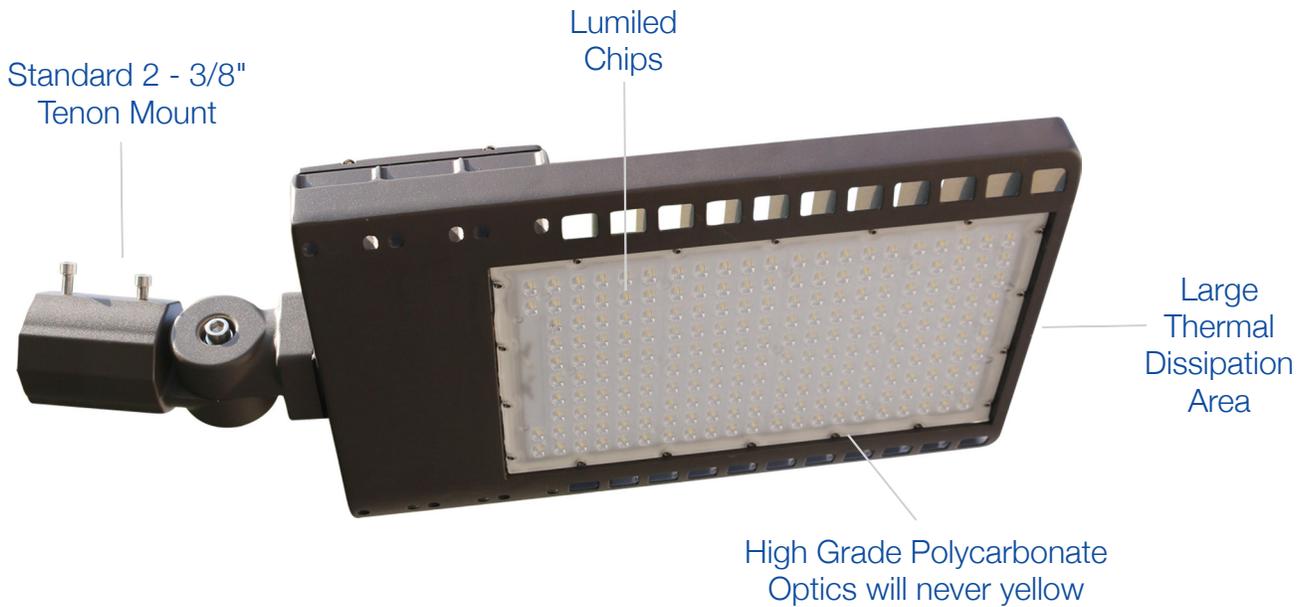

Dimensions

