


230W Flood / Area Light, 277-480V



Ideal for outdoor applications such as parking lots, construction sites, storage and rail yards, industrial locations, marinas, billboard/sign illumination and more

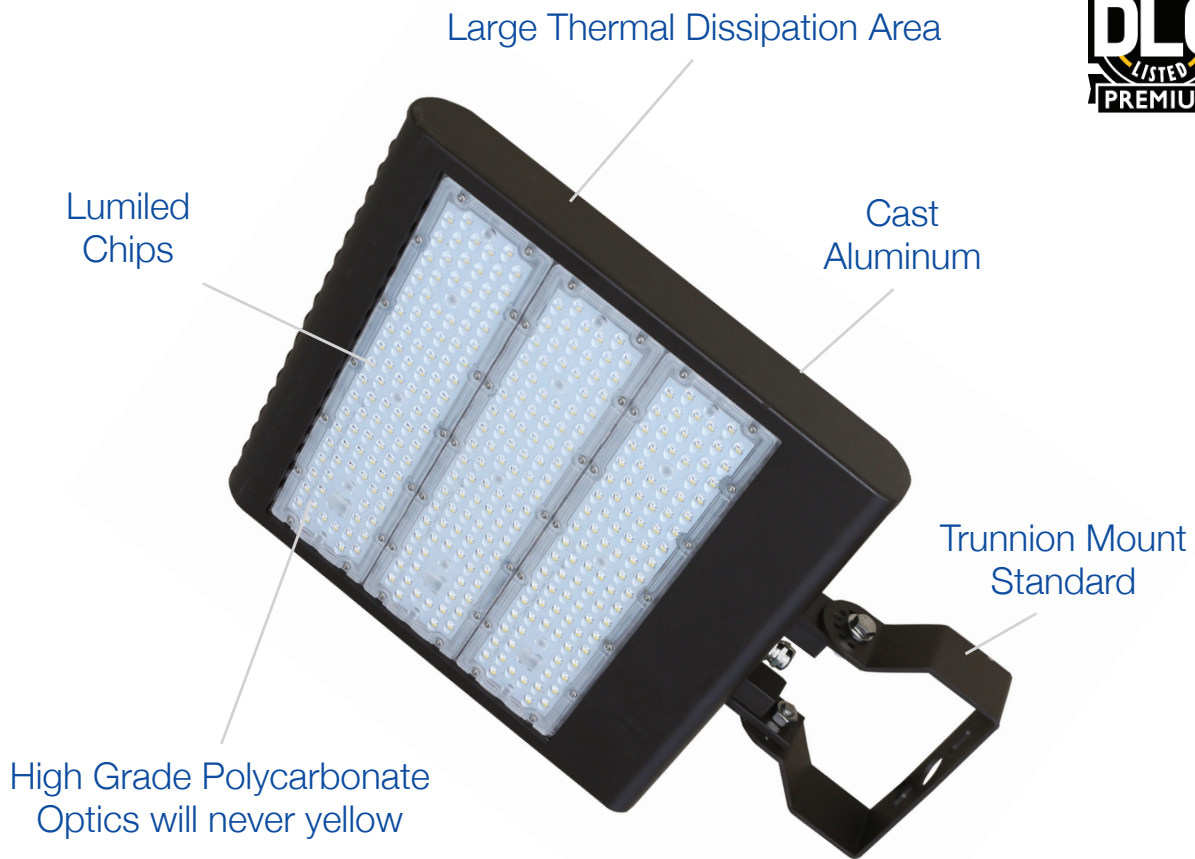

Optional Field-Interchangeable Mounting Arms (ordered separately)



Slip Fit
FL01P-SF



Horizontal Arm
FL01P-HA



Round Pole
FL01P-RPA

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	32,456
Efficacy	137.88 lm/W
CCT	5000K
Beam angle	90 x 120°
CRI	70
Dimmable	0-10V
Rated hours	50,000
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC	PLTRN88R30EA

ILLUMINANCE AT A DISTANCE

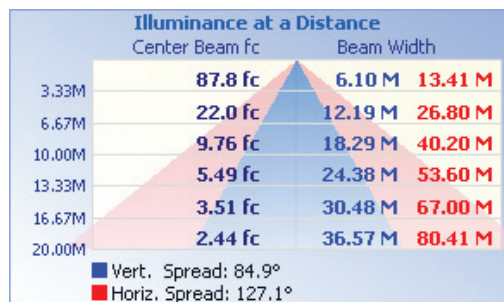


ELECTRICAL

Wattage	230W
Voltage	277-480V
Power factor	0.90
THD	15%
Operating temp	-40° to 40°C


CONSTRUCTION

Housing	Aluminum
Finish	6mm, powder-coat
Colour	Bronze
IP rating	IP65
Weight	13.8 lbs
Carton qty	1

DIMENSIONS

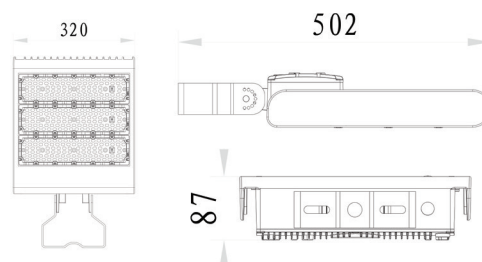

ISOCANDELA PLOT

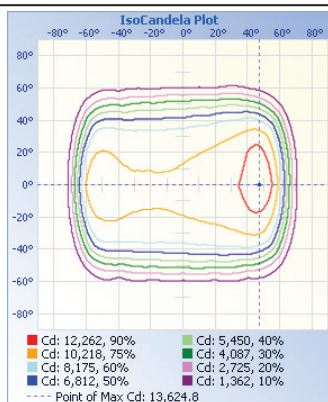

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com