

# 300W Flood / Area Light



NEW FL04 Series

Sleek, streamlined design with premium performance

LM80  
Tested Chips

Polyester  
Powder Coat Finish  
Bronze Standard

Shown here with  
Pole Mount

Highest Grade  
Polycarbonate Optics

Type III Standard  
Type V Available

Trunnion Mount Standard

Field-Interchangeable:  
Slip Fitter, Pole, or Multi-Mount  
Ordered Separately

Options available (ordered separately):

Pole Mount



FL04-PM-WH

Multi Mount



FL04-MM-WH

Slip Fit Mount



FL04-SF-WH

Motion Sensor or Photocell



FL04-MMS-KIT

FLPC-LV

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	39,090 lm
Efficacy	128.19 lm/W
CCT	5000K
CRI	70
L70 Life	54,000
Dimmable	0-10V
Warranty	10-year


### APPROVALS AND LISTINGS

cUL	E482965
DLC	PLRTSAK49P2A

### ILLUMINANCE AT A DISTANCE

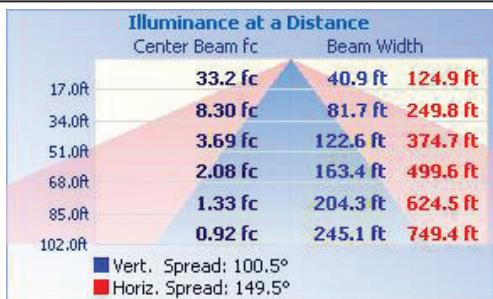

### ISOCANDELA PLOT

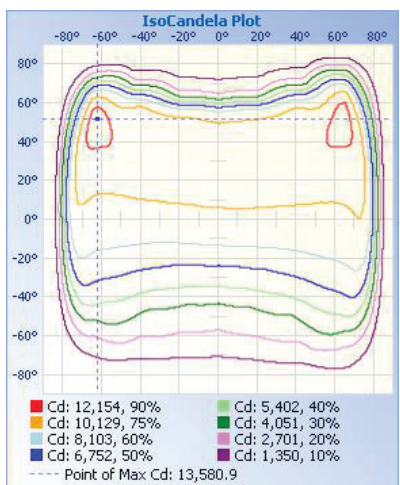

### ELECTRICAL

Wattage	300W
Voltage	120-277V
Power factor	0.90
THD	15 %
Operating temp	-40 to 40°C

### CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder coat
Colour	White
IP rating	IP65
EPA rating	45° - 1.75 ft <sup>2</sup> Horizontal - 1.1 ft <sup>2</sup> Vertical - 2.3 ft <sup>2</sup>
Weight	17.64 lbs
Carton qty	1

### DIMENSIONS

